



诚信铸就品牌，品质成就未来
Integrity Casting Brand, Quality Defining Achievements



✉ 邮箱(Email): sales@kaistonequipment.com / sales@kaistoncaster.com

☎ 电话(Tel/WA): +86 150 1058 9525

🌐 网址(Web): www.kaistonequipment.com / www.kaistoncaster.com

📍 地址:北京市朝阳区南磨房37号华腾北塘商务大厦0509室
Add: RM0509, Huateng Beitang Business Building, No.37,
Nanmofang, Chaoyang District, 100022, Beijing, China.



北京凯斯顿设备科技有限公司

BEIJING KAISTON EQUIPMENT CO.,LTD.

GLOBAL SUPPLY CHAIN PTE. LTD (SINGAPORE)

诚信 / 专业 / 品质 / 创新
Integrity Professionalism Quality Innovation

开发、制造、服务的全球化企业

Global enterprise engaged in development, manufacturing, and service

手动搬运车-AF款
Manual handling vehicle – AF model

- 产品特点:
- 1、锻打摇臂，加装铜套（提升强度、耐磨度、重载不变形）
 - 2、整体油缸（加粗活塞杆，起升更省力）
 - 3、高档手柄（握感舒适，防滑，加厚耐用）
 - 4、实心拉杆（重载不变形）

- Product features:
- 1、Forging rocker arms and installing copper sleeves (to enhance strength, wear resistance, and prevent deformation under heavy loads)
 - 2、Integral oil cylinder (with thicker piston rod for easier lifting)
 - 3、High end handle (comfortable grip, anti slip, thick and durable)
 - 4、Solid rod (no deformation under heavy load)



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit			
额定载重rated load	Kg	2000	3000	5000
降低时高度Height during descent	mm	85	85	85
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70	Φ80*70	Φ80*66
总体高度Overall height	mm	1224	1224	1224
总体长度overall length	mm	1533/1603	1533/1603	1533/1603
货叉长度FORK LENGTH	mm	1150/1220	1150/1220	1150/1220
货叉外宽Fork outer width	mm	550/685	550/685	550/685
自重weight	Kg	78/80	82/84	114/120



不锈钢手动搬运车


Stainless steel manual handling vehicle

产品特点:

- 1、整体不锈钢304材质（电解抛光，防腐耐用，承载不变形）
- 2、一体式货叉（货叉整体冲压，拒绝拼接,结实耐用）
- 3、加强摇臂（提升强度，拒绝重载变形）
- 4、一体不锈钢油缸（整体不锈钢泵，液压集成一体式设计，内置进口密封圈，密封设计防漏可靠）

Product features:

- 1、Overall stainless steel 304 material (electrolytic polishing, anti-corrosion and durable, bearing without deformation)
- 2、Integrated fork (fork stamped as a whole, refusing to be spliced, sturdy and durable)
- 3、Strengthen the rocker arm (increase strength, reject heavy load deformation)
- 4、Integrated stainless steel oil cylinder (integrated stainless steel pump, hydraulic integrated design,Built in imported sealing ring, sealing design is leak proof and reliable)

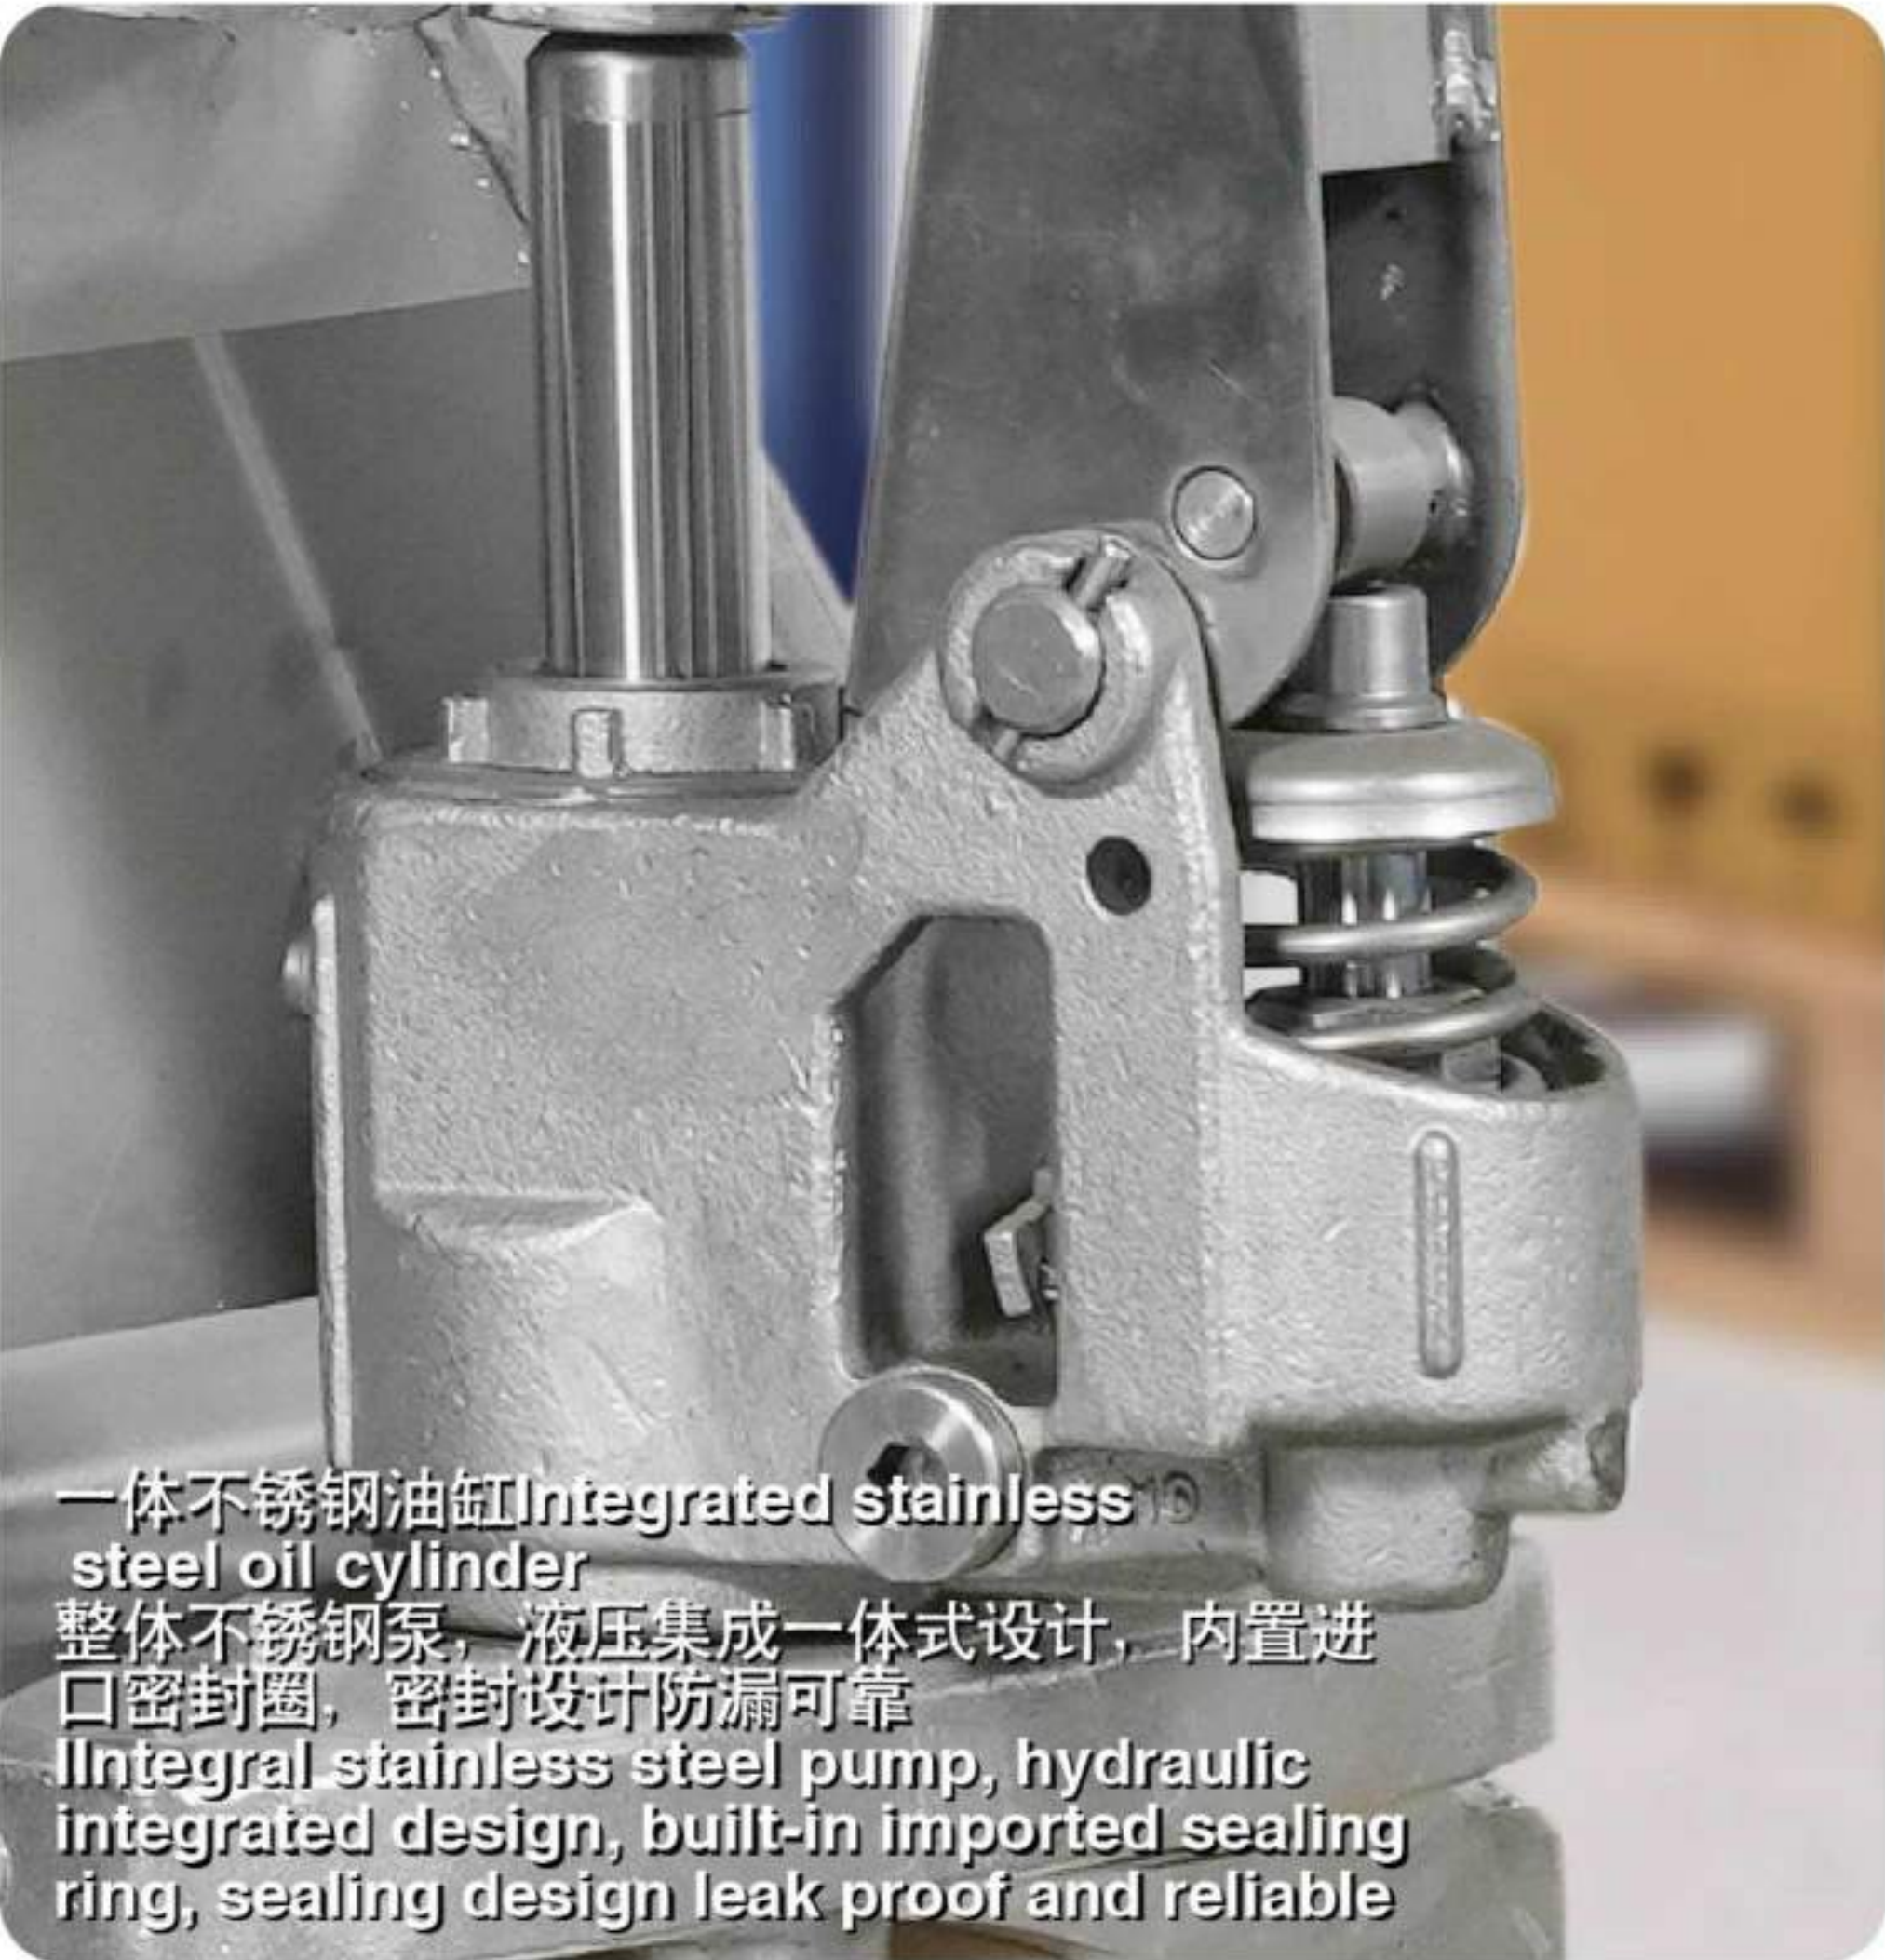

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	
额定载重rated load	Kg	3000
降低时高度Height during descent	mm	85
大轮尺寸Large wheel size	mm	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70
总体高度Overall height	mm	1215
总体长度overall length	mm	1560/1603
货叉长度FORK LENGTH	mm	1150/1220
货叉外宽Fork outer width	mm	550/685
自重weight	Kg	76/80



电子秤手动搬运车
Electronic scale manual handling vehicle

- 产品特点:
- 1、整体油缸（进口阀芯，密封性好，加粗精钢弹簧，回弹更快效率更高）
 - 2、IP66级表头（高防水、高防尘、高防撞）
 - 3、高精分度传感器（分度值0.1，精度高、灵敏高、误差低）
 - 4、高强度锰钢车架（加厚、防撞、不变形）
- Product features:
- 1、Integrated oil cylinder (imported valve core, good sealing. Bold and refined steel spring, faster rebound and higher efficiency)
 - 2、IP66 level header (high waterproof, high dustproof, high anti-collision)
 - 3、High precision indexing sensor (with an indexing value of 0.1, high accuracy, sensitivity, and low error)
 - 4、High strength manganese steel frame (thickened, anti-collision, non deformed)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage




加厚货叉
Thick fork



加粗弹簧
Bold spring



IP66级表头IP66 level meter head
高防水、高防尘、高防撞
High waterproof, high dustproof, high anti-collision

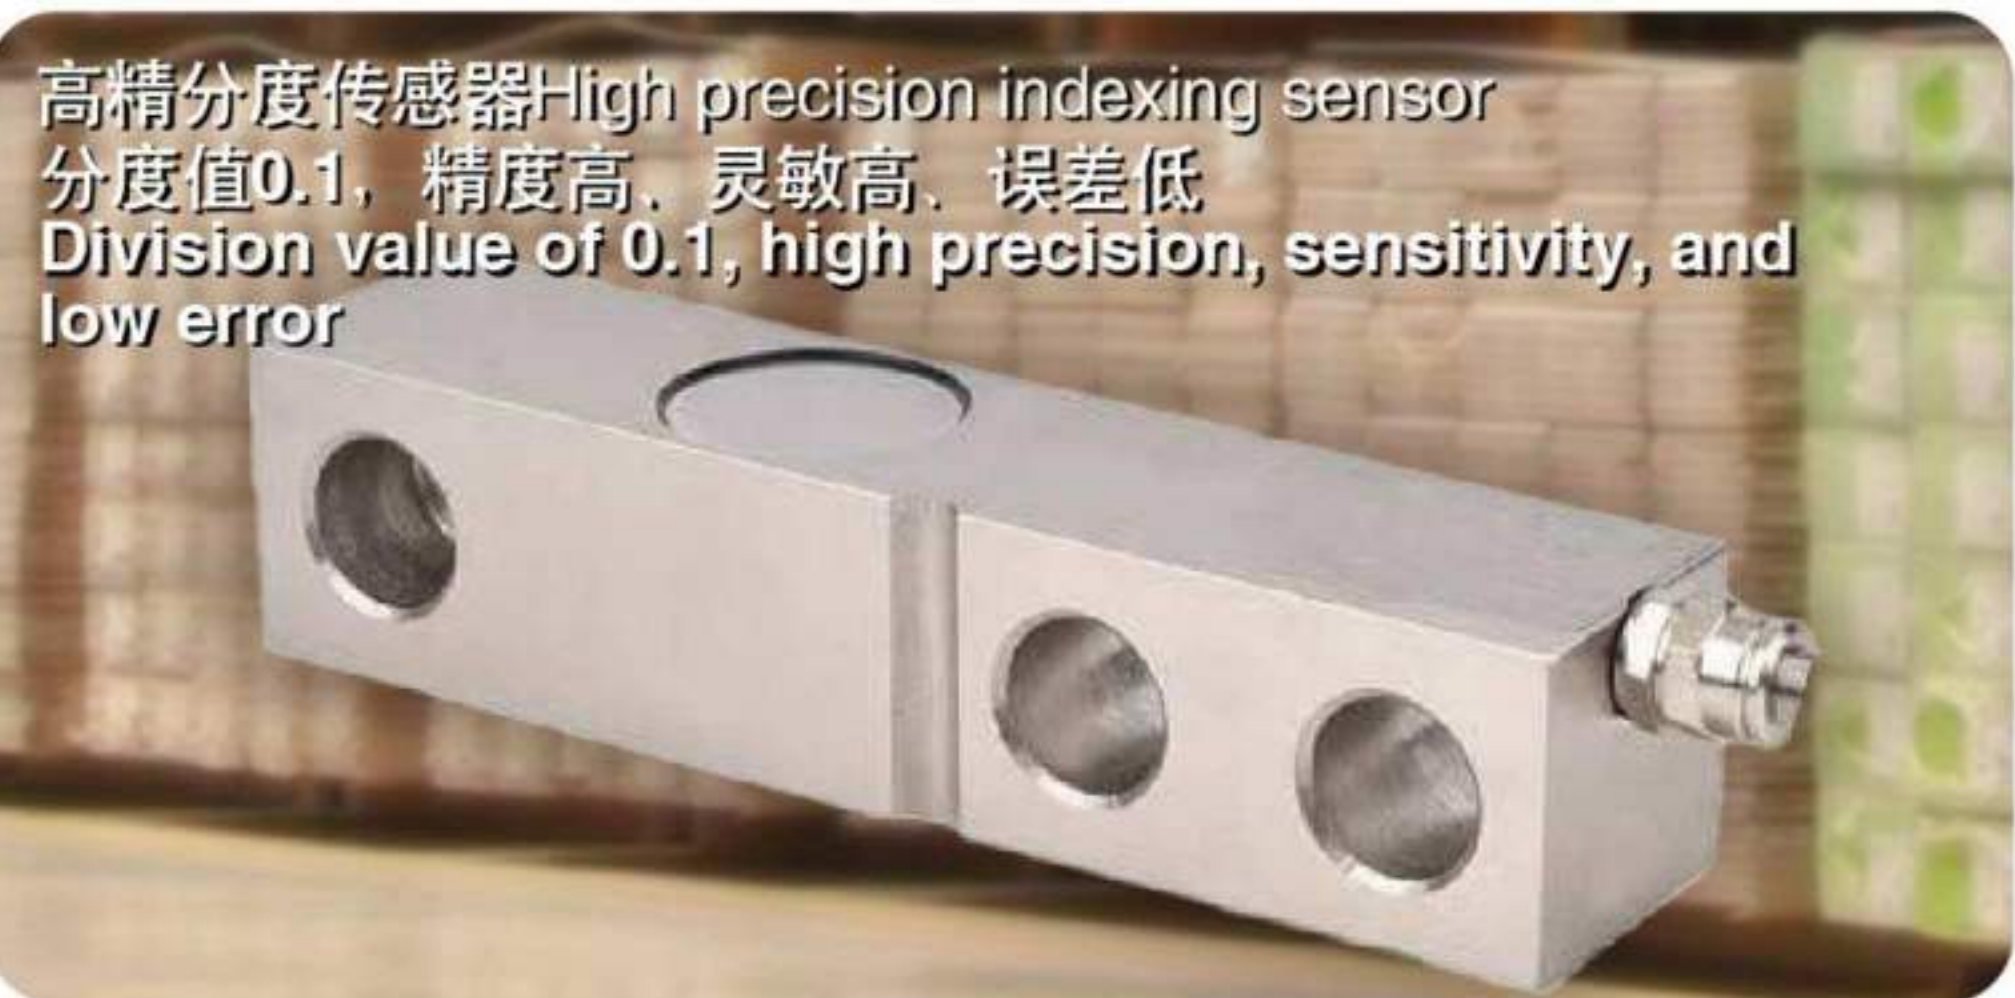

高精分度传感器High precision indexing sensor
分度值0.1，精度高，灵敏高，误差低
Division value of 0.1, high precision, sensitivity, and low error



整体油缸Integrated oil cylinder
进口阀芯，密封性好，加粗精钢弹簧，回弹更快效率更高
Imported valve core with good sealing performance, Bold stainless steel spring, rebound Faster and more efficient



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit		
额定载重rated load	Kg	2000	3000
降低时高度Height during descent	mm	85	85
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70	Φ80*70
总体高度Overall height	mm	1224	1224
总体长度overall length	mm	1533/1603	1533/1603
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550/685	550/685
称重表头电池电压/容量 Weighing meter head battery voltage/capacity	内置 built-in	7.4V/10000mAh	7.4V/10000mAh
称重误差（分度值）Weighing error (division value)		0.1	0.1
自重weight	Kg	104/107	104/107

全电动搬运车SL20
Fully electric transport vehicle SL20

- 产品特点:
- 1、电磁刹车 (防止重载溜坡)
 - 2、可拆卸电池包 (6秒快速更换)
 - 3、智能操作手柄 (可快慢速自由切换, 紧急反向)
 - 4、强劲动力 (0.9千瓦驱动电机)

- Product features:
- 1、Electromagnetic braking (to prevent heavy loads from rolling downhill)
 - 2、Detachable battery pack (quick replacement in 6 seconds)
 - 3、Intelligent joystick (can switch between fast and slow speeds freely, emergency reverse)
 - 4、Strong power (0.9 kW drive motor)



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL		单位unit	CBD15SL	CBD20SL
	驱动方式Drive mode			电动 electric	电动 electric
	操作类型Operation type			步行式 Walking style	步行式 Walking style
	载重load		Kg	1500	2000
基本尺寸 Basic dimensions	重量含蓄电池Weight reserved battery		Kg	139	142
	整车长度Vehicle length		mm	1650	1650
	整车宽度Vehicle width		mm	550/685	550/685
	整车高度Vehicle height		mm	1200	1200
	起升高度Lift Height		mm	195	195
	货叉尺寸Fork size		mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width		mm	550/685	550/685
	轮子类型wheel type			PU/PU聚氨酯 PU/PU polyurethane	PU/PU聚氨酯 PU/PU polyurethane
	驱动轮尺寸Drive wheel size			Φ210*80	Φ210*80
	承重轮尺寸Bearing wheel size			4*Φ80*70	4*Φ80*70
性能 Performance	行走速度 满载 / 空载Walking speed with full load/empty load		Km/h	4/5	4/5
	爬坡度 满载 / 空载Climbing degree with full load/empty load		%	3/5	3/5
	制动方式Braking method			电磁制动 Electromagnetic braking	电磁制动 Electromagnetic braking
	驱动电机功率Drive motor power		Kw	0.75	0.9
驱 动 Drive	起升电机功率Power of lifting motor		kw	0.8	0.8
	蓄电池电压/容量Battery voltage/capacity		V/Ah	24V20Ah	24V20Ah
	蓄电池重量Weight of battery		kg	5.3	5.3
	蓄电池尺寸长/宽/高Battery size: length/width/height		mm	3600/360/100	3600/360/100
其 他other	蓄电池类型Battery type			锂电Lithium battery	锂电Lithium battery
	驱动控制类型Drive control type			直流direct	直流direct

舒适把手
Comfortable Grip

耐磨防滑
Wear resistant
and slip resistant

加固加厚
Strengthening and
thickening

不漏油
No oil leakage

加厚货叉
Thick fork

大容量电池
High capacity battery

全电动搬运车SQ20

All electric transport vehicle SQ20

产品特点:

- 1、可快速更换电池（48V12Ah铅酸免维护电池）
- 2、电磁刹车（防止重载溜坡）
- 3、智能操作手柄（快慢速自由切换，紧急反向）

Product features:

- 1、Quick battery replacement (48V12Ah maintenance free lead-acid battery)
- 2、Electromagnetic braking (to prevent heavy loads from rolling downhill)
- 3、Intelligent operation handle, (fast and slow speed can be freely switched, emergency reverse)



智能操作手柄
Intelligent operation handle
快慢速自由切换，紧急反向
Fast slow free switching,
emergency reverse



聚氨酯静音轮
Polyurethane silent wheel
不伤地面，双轮承载更稳定
No damage to the ground, dual
wheel support is more stable



电磁刹车Brake
防止重载溜坡
Prevent overloading and slope sliding



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD15SQ	CBD20SQ
	驱动方式Drive mode		电动electric	电动electric
	操作类型Operation type		步行式Walking style	步行式Walking style
	载荷load	Kg	1500	2000
	重量含蓄电池Weight reserved battery	Kg	143	147
	整车长度Vehicle length	mm	1650	1650
基本尺寸 Basic dimensions	整车宽度Vehicle width	mm	550/685	550/685
	整车高度Vehicle height	mm	1200	1200
	起升高度lifting height	mm	195	195
	货叉尺寸Minimum height of fork	mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width	mm	550/685	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/polyurethane	PU/PU聚氨酯PU/polyurethane
	驱动轮尺寸Drive wheel size		Φ210*80	Φ210*80
性能 Performance	承载轮尺寸Bearing wheel size		4*Φ80*70	4*Φ80*70
	行走速度满载/空载Walking speed with full load/empty load	m/s	4/4.5	4/4.5
	爬坡度满载/空载Climbing degree with full load/empty load	km/h	3/5	3/5
	制动方式Braking method		电磁制动Electromagnetic braking	电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	0.75	1
驱动 Drive	起升电机功率Power of lifting motor		0.8	0.8
	蓄电池电压/容量Battery voltage/capacity	V/Ah	48V/12Ah	48V/12Ah
	蓄电池重量Weight of battery	kg	21	21
	蓄电池尺寸长/宽/高 Battery size: length/width/height	mm	370/105/335	370/105/335
其他other	蓄电池类型Battery type		铅酸Lead acid	铅酸Lead acid
	驱动控制类型Drive control type		直流无刷dc brushless	直流无刷dc brushless



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery

凯斯顿
Kaiston

PRODUCT DISPLAY

产品展示

全电动搬运车FL15
Fully electric transport vehicle FL15

- 产品特点:
- 1、电磁刹车（防止重载溜坡）
 - 2、可快速更换电池（6秒快速更换）
 - 3、48V750W无刷电机（免维护驱动电机）
 - 4、智能操作手柄（快慢速自由切换，紧急反向）
- Product features:
- 1、Electromagnetic brake (to prevent heavy load sliding)
 - 2、Quick battery replacement (6-second quick replacement)
 - 3、48V750W brushless motor (maintenance free drive motor)
 - 4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant

加固加厚
Strengthening and
thickening

不漏油
No oil leakage

加厚货叉
Thick fork

大容量电池
High capacity battery

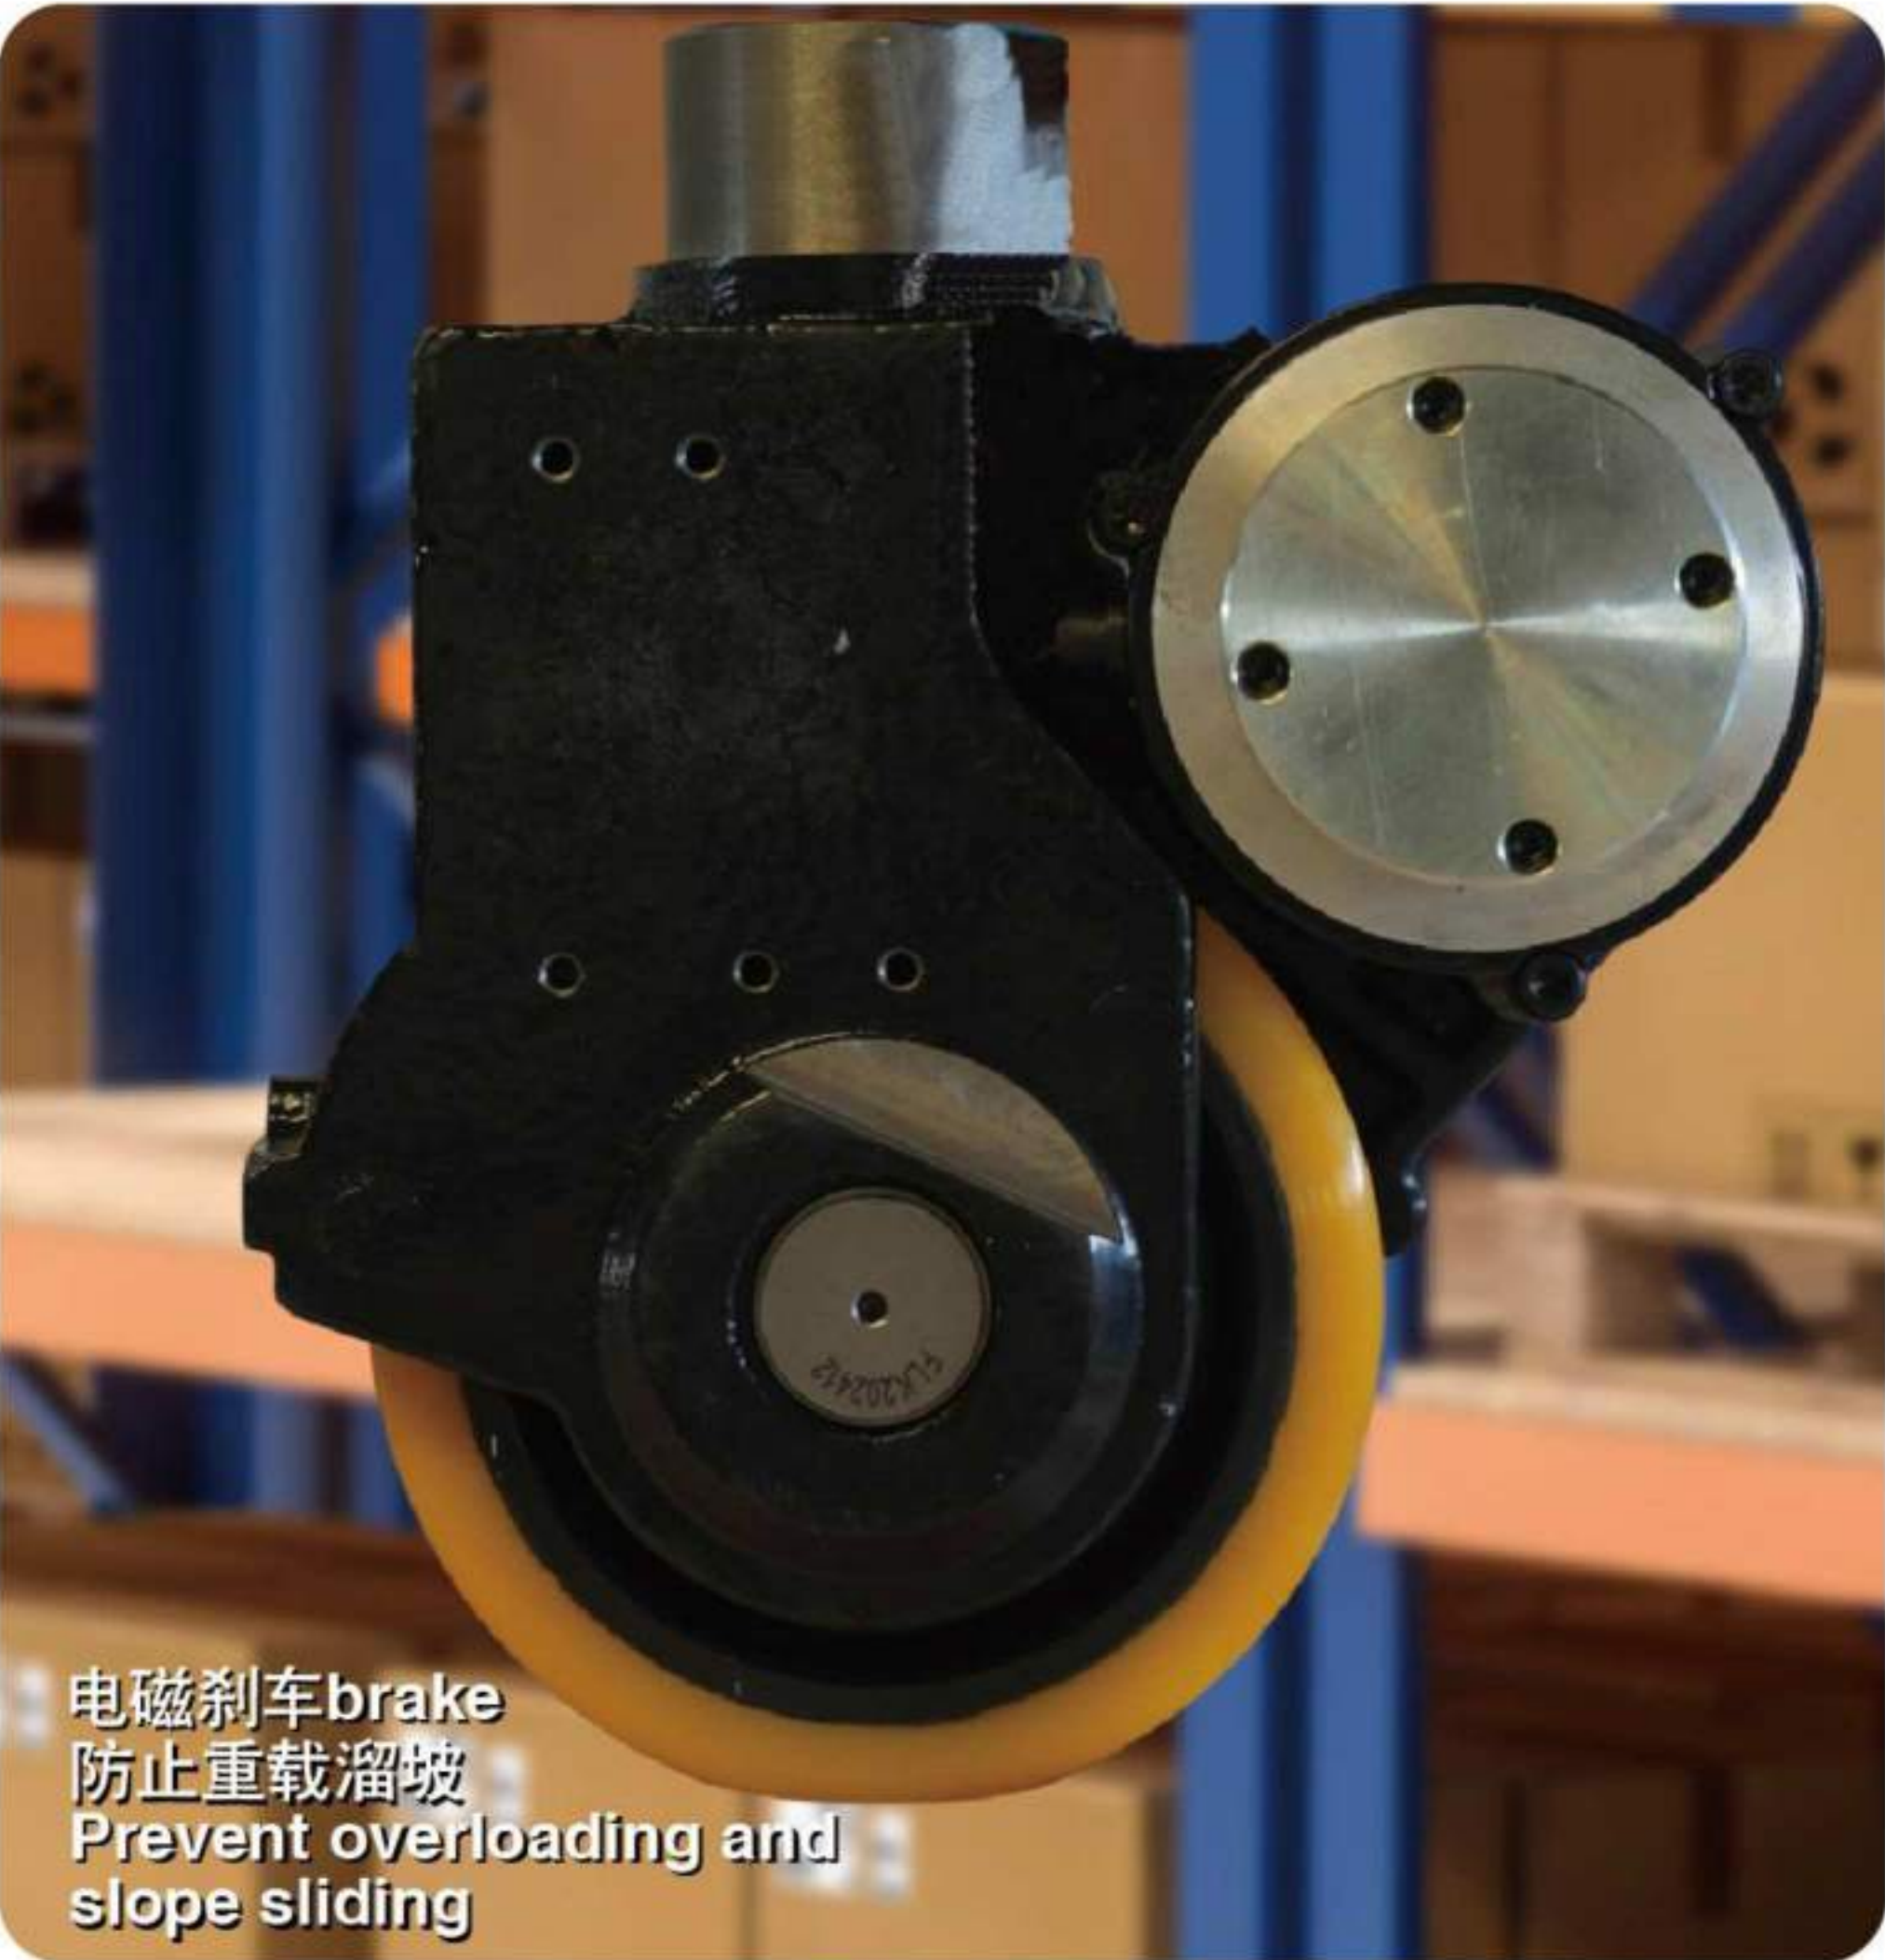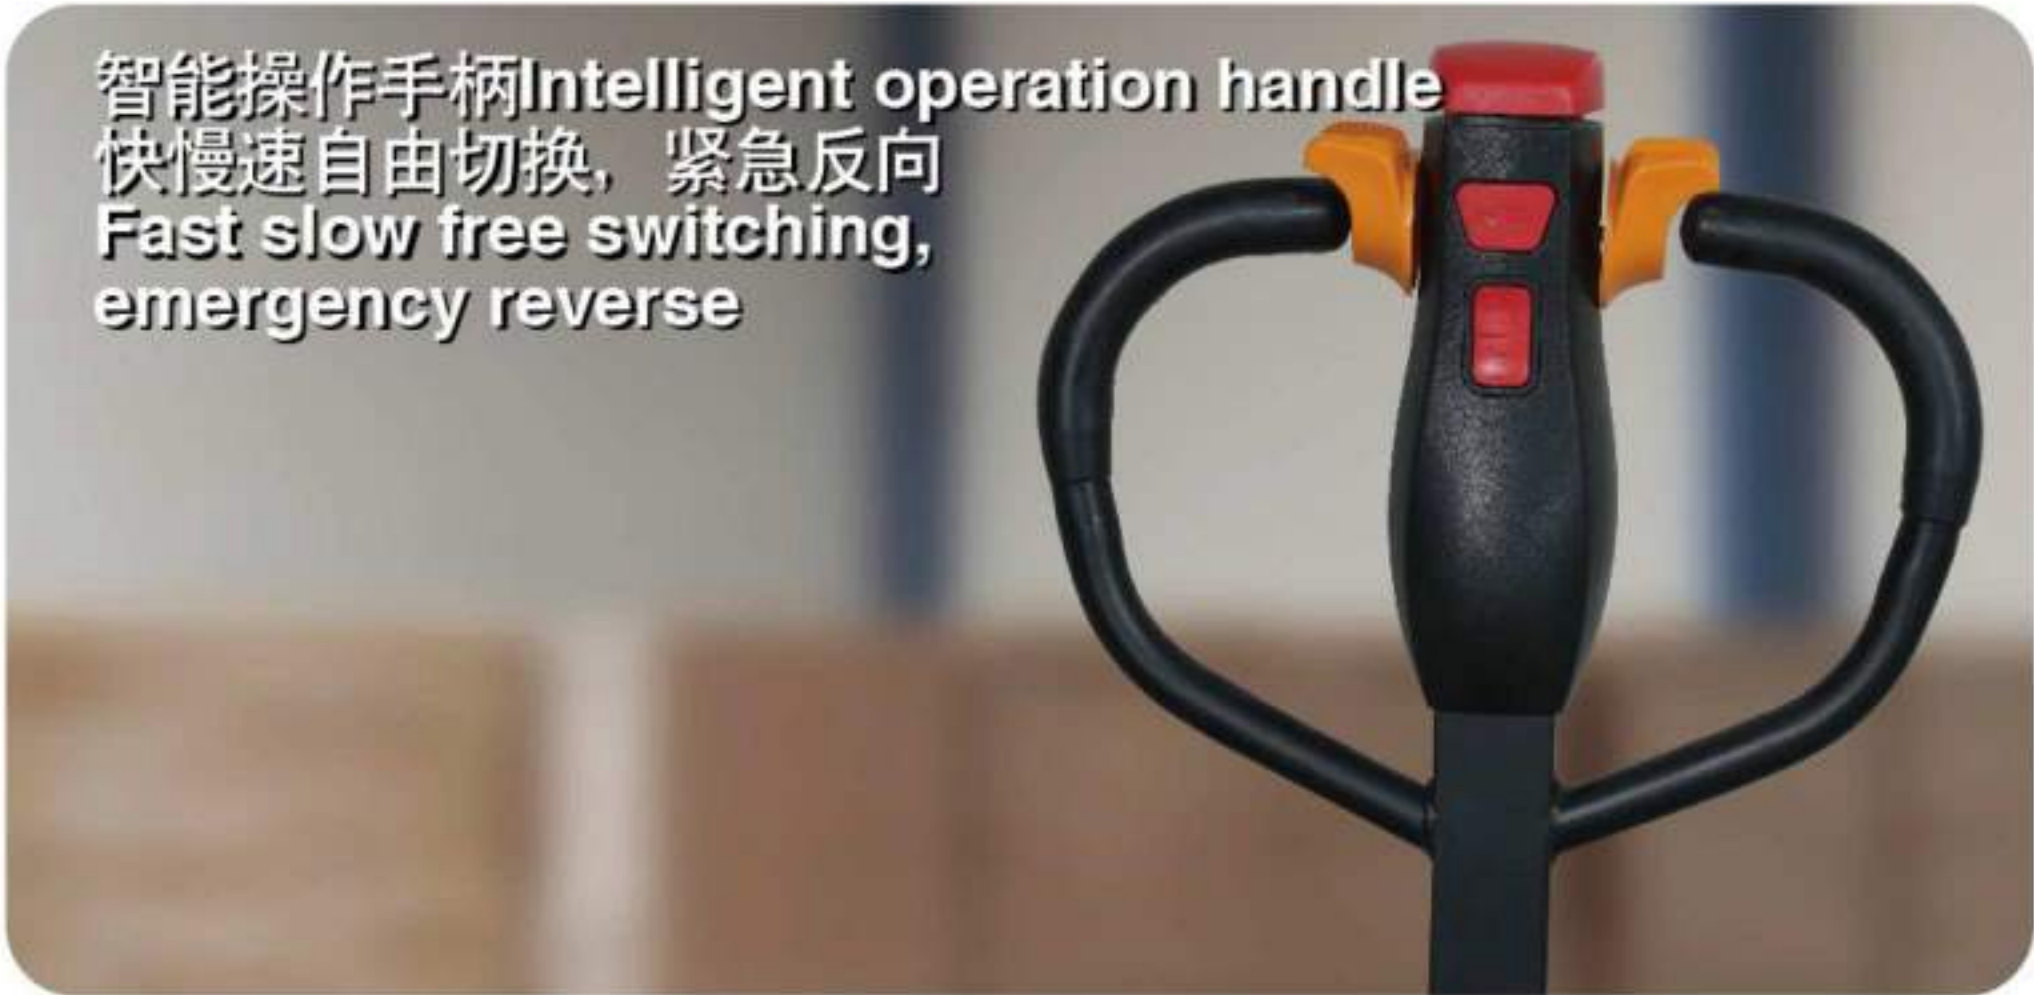

技术参数 | TECHNICAL PARAMETERS

特 性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD15FL	CBD20FL
	驱动方式Drive mode		电动electric	电动electric
	操作类型Operation type		步行式Walking style	步行式Walking style
	载荷load	Kg	1500	2000
	重量含蓄电池Weight reserved battery	Kg	115.5	117.5
	整车长度Vehicle length	mm	1600	1600
基本尺寸 Basic dimensions	整车宽度Vehicle width	mm	550/685	550/685
	整车高度Vehicle height	mm	1200	1200
	起升高度Lift Height	mm	195	195
	货叉尺寸Fork size	mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width	mm	550/685	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane	PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ160*50	Φ160*50
	承载轮尺寸Bearing wheel size		4*Φ80*70	4*Φ80*70
性 能 Performance	行走速度满载/空载Walking speed with full load/empty load	Km/h	4/5	4/5
	爬坡度满载/空载Climbing degree with full load/empty load	%	3/5	3/5
	制动方式Braking method		电磁制动Electromagnetic braking	电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	0.75	1
驱 动 Drive	起升电机功率Power of lifting motor	kw	0.5	0.8
	蓄电池电压/容量Battery voltage/capacity	V/Ah	48V10Ah	48V15Ah
	蓄电池重量Weight of battery	kg	4.3	5.1
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	210/173/85	210/173/85
其 他other	蓄电池类型Battery type		锂电Lithium battery	锂电Lithium battery
	驱动控制类型Drive control type		直流无刷dc brushless	直流无刷dc brushless

全电动大金刚搬运车WQ20
All electric Diamond Transporter WQ20

- 产品特点:
- 1、强劲动力 (1.0千瓦驱动电机)
 - 2、独立的泵站 (起升动力强劲, 性能安全稳定)
 - 3、电磁刹车 (防止重载溜坡)
 - 4、智能操作手柄 (快慢速自由切换, 紧急反向)

- Product features:
- 1、Strong power (1.0 kW drive motor)
 - 2、Independent pump station (strong lifting power, safe and stable performance)
 - 3、Electromagnetic brake (to prevent heavy load from rolling downhill)
 - 4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery



智能操作手柄
Intelligent operation handle
快慢速自由切换, 紧急反向
Fast slow free switching,
emergency reverse



电磁刹车 brake
防止重载溜坡
prevention of heavy
load and slope sliding




独立泵站 Independent pump station electromagnetic
起升动力强劲 性能安全稳定
Strong lifting power, safe and stable
performance

技术参数 | TECHNICAL PARAMETERS

特 性 characteristic	产品型号PRODUCT MODEL		单位unit	CBD20WQ
	驱动方式Drive mode			电动electric
	操作类型Operation type			步行式Walking style
	载荷load		Kg	2000
	重量含蓄电池Weight reserved battery		Kg	177
	整车长度Vehicle length		mm	1650
基本尺寸 Basic dimensions	整车宽度Vehicle width		mm	550/685
	整车高度Vehicle height		mm	1250
	起升高度Lift Height		mm	200
	货叉尺寸Fork size		mm	56/160/1150
	货叉外宽Fork outer width		mm	550/685
	轮子类型wheel type			PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size			Φ210*75
	承载轮尺寸Bearing wheel size			4*Φ80*70
性 能 Performance	行走速度 满载/空载Walking speed with full load/empty load		Km/h	3.5/4
	爬坡速度 满载/空载Climbing degree with full load/empty load		%	6/10
	制动方式Braking method			电磁制动Electromagnetic braking
	驱动电机功率Drive motor power		Kw	1
驱 动 Drive	起升电机功率Power of lifting motor		kw	0.8
	蓄电池电压/容量Battery voltage/capacity		V/Ah	4*12/20
	蓄电池重量Weight of battery		kg	24.5
	蓄电池尺寸长/宽/高Battery size: length/width/height		mm	317/191/202
其 他 other	蓄电池类型Battery type			铅酸免维护Lead acid maintenance free
	驱动控制类型Drive control type			直流无刷dc brushless

全电动大金刚搬运车WQ30
All electric Diamond Transporter WQ30

- 产品特点:
- 1、智能操作手柄（快慢速自由切换，紧急反向）
 - 2、电磁刹车（防止重载溜坡）
 - 3、48V1200W无刷驱动（免维护、动力强）
 - 4、PU静音轮（不伤地面，双轮承载更稳定）
- Product features:
- 1、Intelligent operation handle (Fast slow free switching, emergency reverse)
 - 2、Electromagnetic brake (to prevent heavy load from rolling downhill)
 - 3、48V1200W brushless drive (maintenance free, powerful)
 - 4、PU silent wheel (does not damage the ground, dual wheel bearing is more stable)

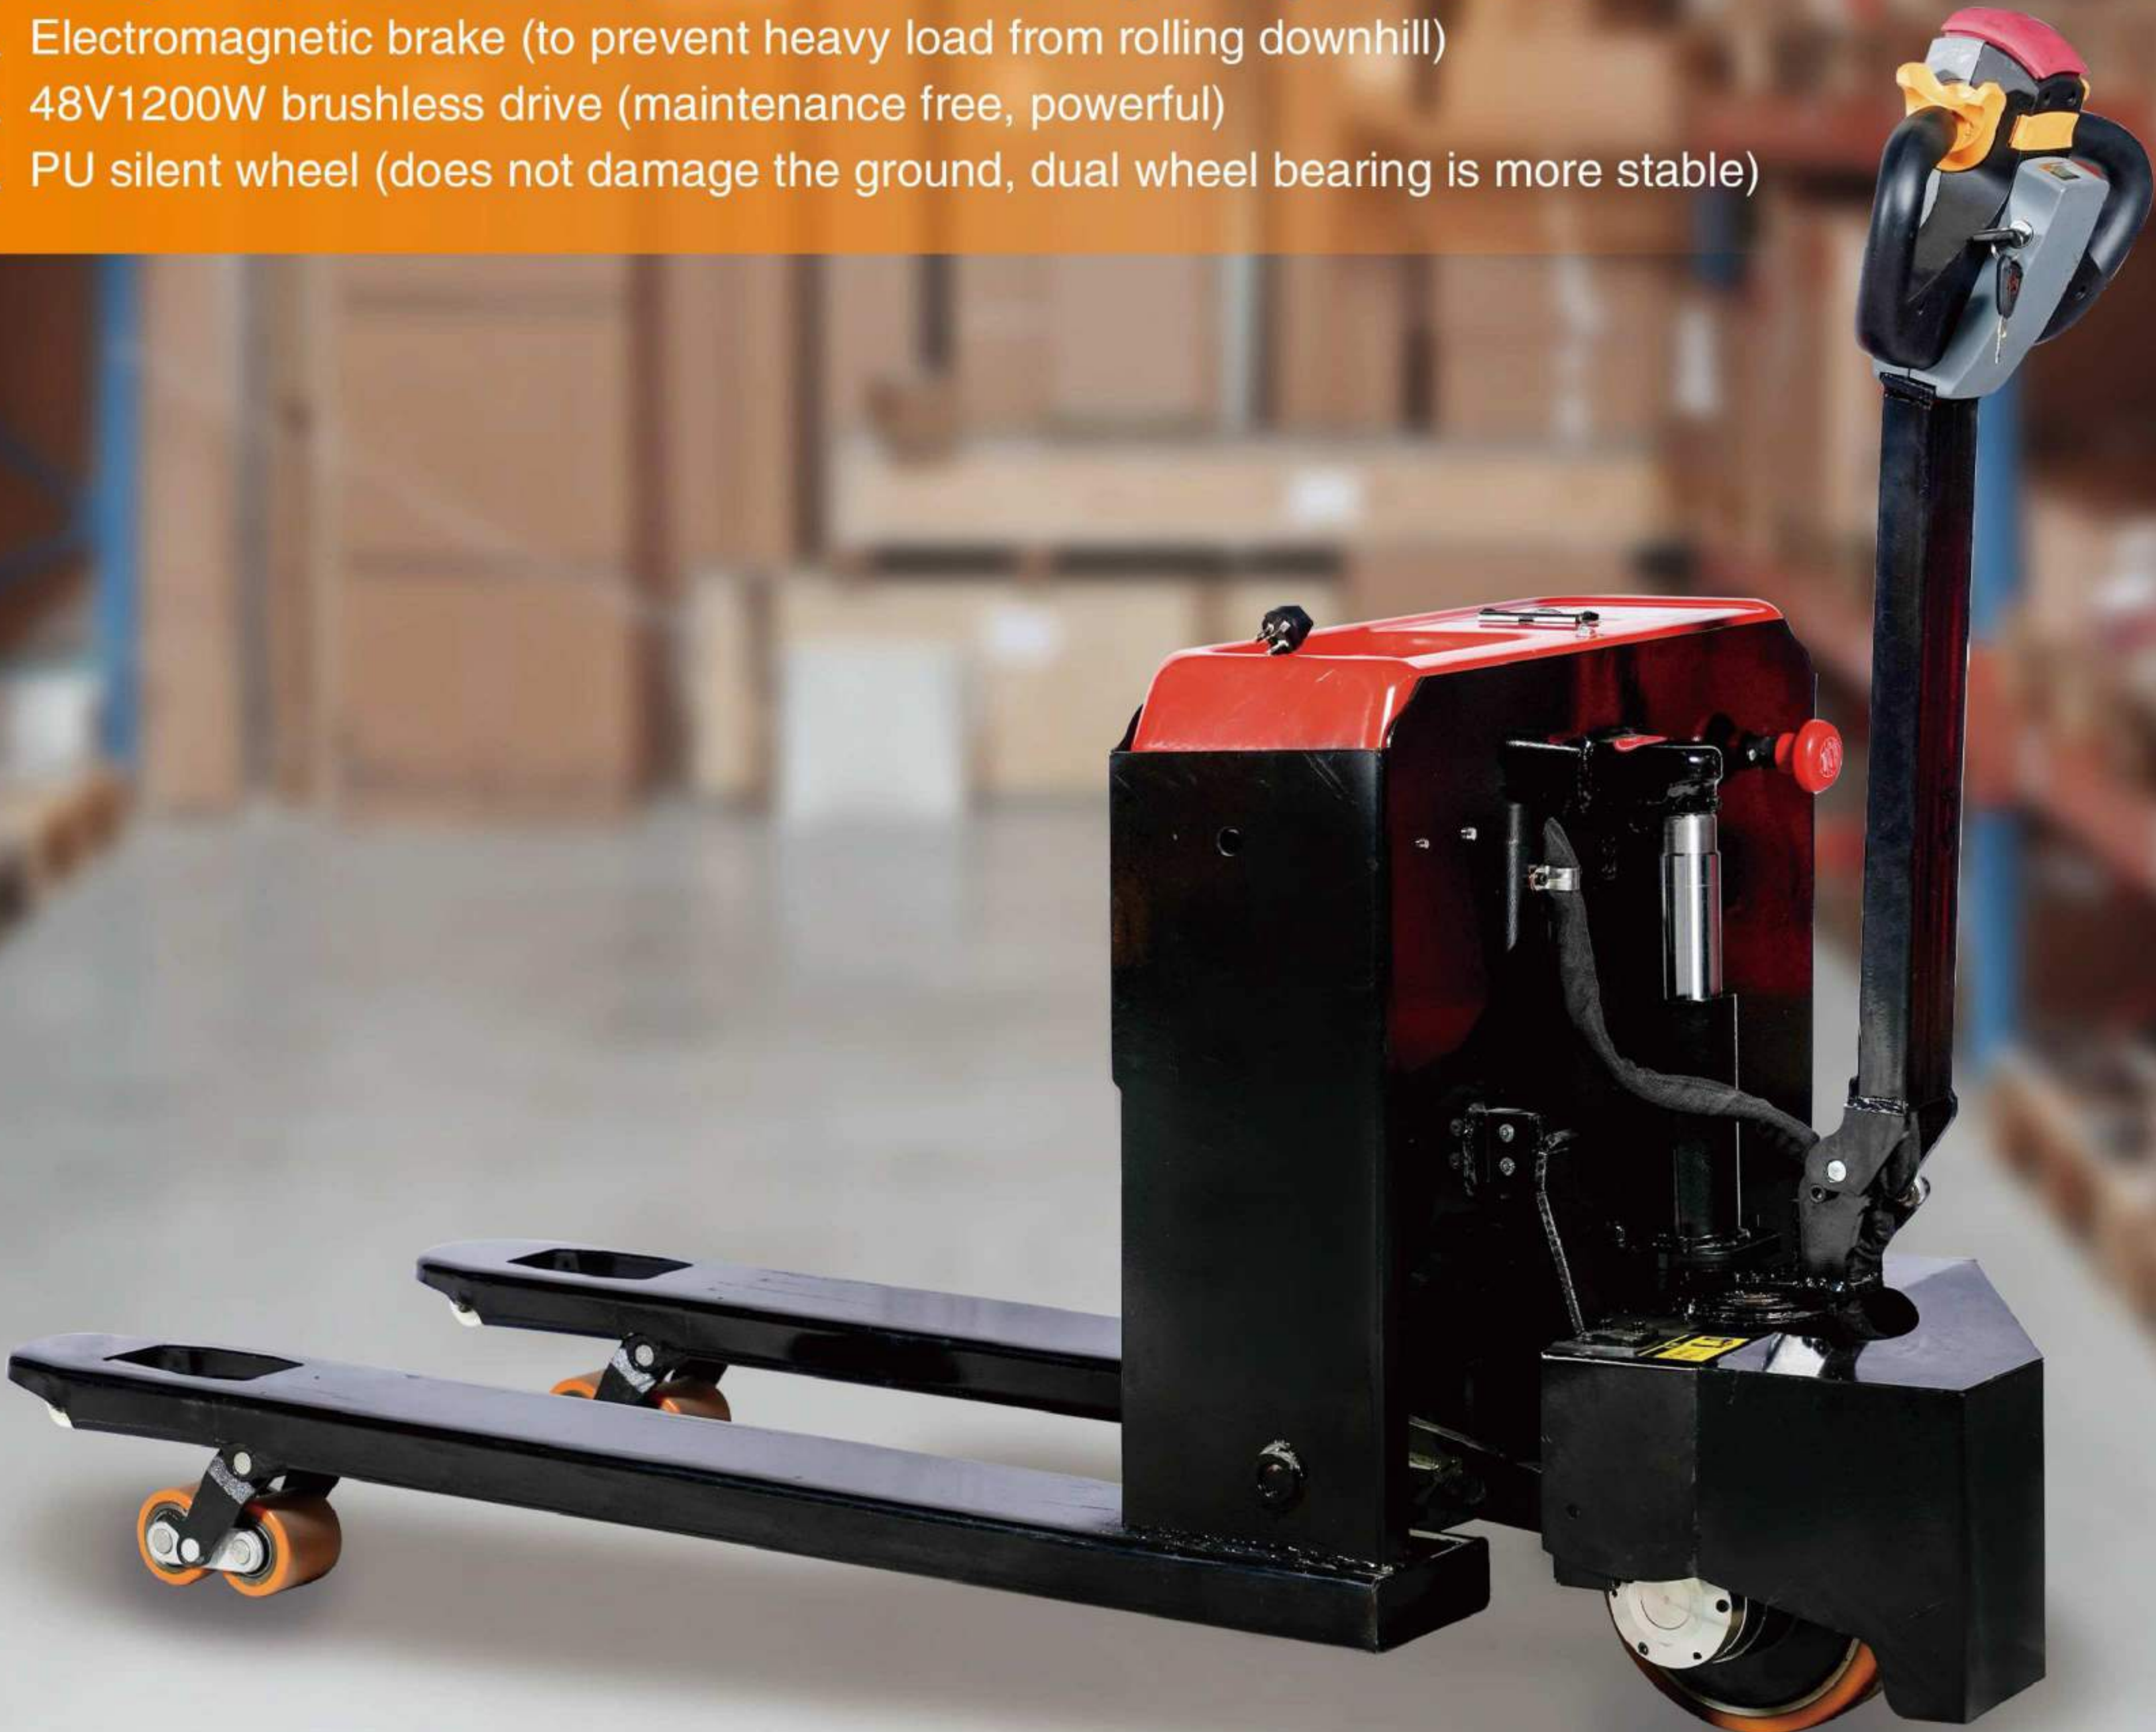

舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery

智能手柄Smart controller
快慢速自由切换，紧急反向
Fast slow free switching,
emergency reverse



PU静音轮PU silent wheel
不伤地面，双轮承载更稳定
No damage to the ground, dual wheel
support is more stable



电磁刹车Brake
防止重载溜坡
Prevent overloading and slope sliding



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD30WQ
	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	3000
	重量含蓄电池Weight reserved battery	Kg	260
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1710
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1300
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ250*80
性能 Performance	承载轮尺寸Bearing wheel size		4*Φ80*70
	行走速度满载/空载Walking speed with full load/empty load	Km/h	3.5/4
	爬坡度满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1.2
驱动 Drive	起升电机功率Power of lifting motor	kw	1.2
	蓄电池电压/容量Battery voltage/capacity	V/Ah	4*12/63
	蓄电池重量Weight of battery	kg	60
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	236/159/213
其他 other	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
	驱动控制类型Drive control type		直流无刷dc brushless

凯斯顿
Kaiston

PRODUCT DISPLAY 产品展示

全电动大金刚搬运车QQ30
All electric Diamond Transporter QQ30

- 产品特点:
- 1、智能操作手柄（快慢速自由切换，紧急反向）
 - 2、电磁刹车（防止重载溜坡）
 - 3、独立泵站（起升动力强劲，性能安全稳定）
 - 4、48V1000W无刷驱动（免维护、动力强）
- Product features:
- 1、Intelligent operation handle (Fast slow free switching, emergency reverse)
 - 2、Electromagnetic brake (to prevent heavy load from rolling downhill)
 - 3、Independent power unit (strong lifting power, safe and stable performance)
 - 4、48V1000W brushless drive (maintenance free, powerful)



舒适把手
Comfortable Grip

耐磨防滑
Wear resistant
and slip resistant

加固加厚
Strengthening and
thickening

不漏油
No oil leakage

加厚货叉
Thick fork

大容量电池
High capacity battery



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD30QQ
	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
基本尺寸 Basic dimensions	载重load	Kg	3000
	重量含蓄电池Weight reserved battery	Kg	220
	整车长度Vehicle length	mm	1645
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1250
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
性能 Performance	驱动轮尺寸Drive wheel size		Φ210*75
	承载轮尺寸Bearing wheel size		4*Φ80*70
	行走速度 满载/空载Walking speed with full load/empty load	Km/h	3.5/4
	爬坡度 满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1.2
驱动 Drive	起升电机功率Power of lifting motor	kw	0.8
	蓄电池电压/容量Battery voltage/capacity	V/Ah	4*12/32
	蓄电池重量Weight of battery	kg	36.4
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	320/278/208
其他other	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
	驱动控制类型Drive control type		直流无刷dc brushless

全电动重型大金刚搬运车ZQ30
Full electric heavy-duty diamond transport vehicleQ Z30

- 产品特点:
- 1、智能操作手柄（快慢速自由切换，紧急反向）
 - 2、电磁刹车（防止重载溜坡）
 - 3、独立泵站（起升动力强劲，性能安全稳定）
 - 4、48V1500W无刷驱动（免维护、动力强）
- Product features:
- 1、Intelligent operation handle (Fast slow free switching, emergency reverse)
 - 2、Electromagnetic brake (to prevent heavy load from rolling downhill)
 - 3、Independent power unit (strong lifting power, safe and stable performance)
 - 4、48V1500W brushless drive (maintenance free, powerful)



智能操作手柄
Intelligent operation handle
快慢速自由切换，紧急反向
Fast slow free switching,
emergency reverse



电磁刹车Brake
防止重载溜坡
Prevent overloading and slope sliding



独立泵站Independent pumping station
起升动力强劲 性能安全稳定
Strong lifting power, safe and stable performance

技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL		单位	CBD30ZQ
	驱动方式Drive mode			电动electric
基本尺寸 Basic dimensions	操作类型Operation type			步行式Walking style
	载荷load		Kg	3000
	重量含蓄电池Weight reserved battery		Kg	260
	整车长度Vehicle length		mm	1800
	整车宽度Vehicle width		mm	550/685
	整车高度Vehicle height		mm	1250
	起升高度Lift Height		mm	190
	货叉尺寸Fork size		mm	56/160/1150
	货叉外宽Fork outer width		mm	550/685
	轮子类型wheel type			PU/PU聚氨酯PU/PU polyurethane
性能 Performance	驱动轮尺寸Drive wheel size			Φ250*80
	承载轮尺寸Bearing wheel size			4*Φ80*70
	行走速度满载/空载Walking speed with full load/empty load		Km/h	4.5/6
	爬坡度满载/空载Climbing degree with full load/empty load		%	8/15
	制动方式Braking method			电磁制动Electromagnetic braking
驱动 Drive	驱动电机功率Drive motor power		Kw	1.5
	起升电机功率Power of lifting motor		kw	1.2
	蓄电池电压/容量Battery voltage/capacity		V/Ah	24/63或24/120
	蓄电池重量Weight of battery		kg	36
	蓄电池尺寸长/度/高Battery size: length/width/height		mm	236/159/213
其他 other	蓄电池类型Battery type			新能源new energy
	驱动控制类型Drive control type			直流无刷dc brushless

舒适把手
Comfortable Grip

耐磨防滑
Wear resistant
and slip resistant

加固加厚
Strengthening and
thickening

不漏油
No oil leakage

加厚货叉
Thick fork

大容量电池
High capacity battery

纸筒全电动搬运车WQ20-Z
Paper tube fully electric transport vehicle WQ20-Z

- 产品特点:
- 1、强劲动力 (1.0千瓦驱动电机)
 - 2、独立的泵站 (起升动力强劲, 性能安全稳定)
 - 3、电磁刹车 (防止重载溜坡)
 - 4、智能操作手柄 (快慢速自由切换, 紧急反向)

- Product features:
- 1、Strong power (1.0 kW drive motor)
 - 2、Independent pump station (strong lifting power, safe and stable performance)
 - 3、Electromagnetic brake (to prevent heavy load from rolling downhill)
 - 4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)



智能操作手柄
Intelligent operation handle
快慢速自由切换, 紧急反向
Fast slow free switching,
emergency reverse



电磁刹车 brake
防止重载溜坡
prevention of heavy
load and slope sliding



独立泵站 Independent pump station electromagnetic
起升动力强劲 性能安全稳定
Strong lifting power, safe and stable
performance

技术参数 | TECHNICAL PARAMETERS

特 性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD20WQ-Z
	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	2000
基本尺寸 Basic dimensions	重量含蓄电池Weight reserved battery	Kg	177
	整车长度Vehicle length	mm	1650
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1250
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ210*75
	承载轮尺寸Bearing wheel size		4*Φ80*70
性 能 Performance	行走速度 满载/空载Walking speed with full load/empty load	Km/h	3.5/4
	爬坡度 满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1
	起升电机功率Power of lifting motor	kw	0.8
驱 动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	4*12/20
	蓄电池重量Weight of battery	kg	24.5
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	317/191/202
	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
其 他 other	驱动控制类型Drive control type		直流无刷dc brushless



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery

越野全电动搬运车YQL30
Off road all electric transport vehicle YQL30

- 产品特点:
- 1、350mm直径防滑驱动轮（一体注胶轮胎，通过性强、更耐磨）
 - 2、电磁刹车（防止重载溜坡）
 - 3、48V1200W超强动力驱动（大扭矩爬坡更强）
 - 4、智能操作手柄（快慢速自由切换，紧急反向）
- Product features:
- 1、350mm diameter anti slip drive wheel (integrated rubber tire, strong passability, more wear-resistant)
 - 2、Electromagnetic brake (to prevent heavy load sliding)
 - 3、48V1200W ultra strong power drive (stronger climbing ability with high torque)
 - 4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery



智能操作手柄Intelligent operation handle
快慢速自由切换，紧急反向
Fast slow free switching, emergency
reverse



350mm直径防滑驱动轮
350mm diameter anti slip drive wheel
一体注胶轮胎，通过性强、更耐磨
One piece rubber tire with strong passability and greater
wear resistance



电磁刹车brake
防止重载溜坡
Prevent overloading and slope sliding



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL	单位	CBD30YQL
	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	3000
基本尺寸 Basic dimensions	重量含蓄电池Weight reserved battery	Kg	226.5
	整车长度Vehicle length	mm	1650
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1270
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1200
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		注胶及PU轮Glue injection and PU wheels
	驱动轮尺寸Drive wheel size		Φ350*100
	承载轮尺寸Bearing wheel size		4*Φ80*70
性能 Performance	行走速度 满载/空载Walking speed with full load/empty load	Km/h	4/5
	爬坡度 满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1.2
驱动 Drive	起升电机功率Power of lifting motor	kw	0.8
	蓄电池电压/容量Battery voltage/capacity	V/Ah	48/32
	蓄电池重量Weight of battery	kg	36.4
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	320/278/208
其他 other	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
	驱动控制类型Drive control type		直流无刷dc brushless

全电动搬运车 AQ30
All electric transport vehicle AQ30

- 产品特点:
- 1、48V800W无刷电机（免维护驱动电机）
 - 2、智能操作手柄（电动升降、电动行走、紧急反向）
 - 3、上市品牌铅酸电池（48V20Ah免维护电池）
 - 4、PU静音轮（不伤地面，双轮承载更稳定）
- Product features:
- 1、48V800W brushless motor (maintenance free drive motor)
 - 2、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)
 - 3、Listed brand lead-acid battery (48V20Ah maintenance free battery)
 - 4、PU silent wheel (does not damage the ground, dual wheel bearing is more stable)





舒适把手
Comfortable Grip



耐磨防滑
Wear resistant and slip resistant



加固加厚
Strengthening and thickening




不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery

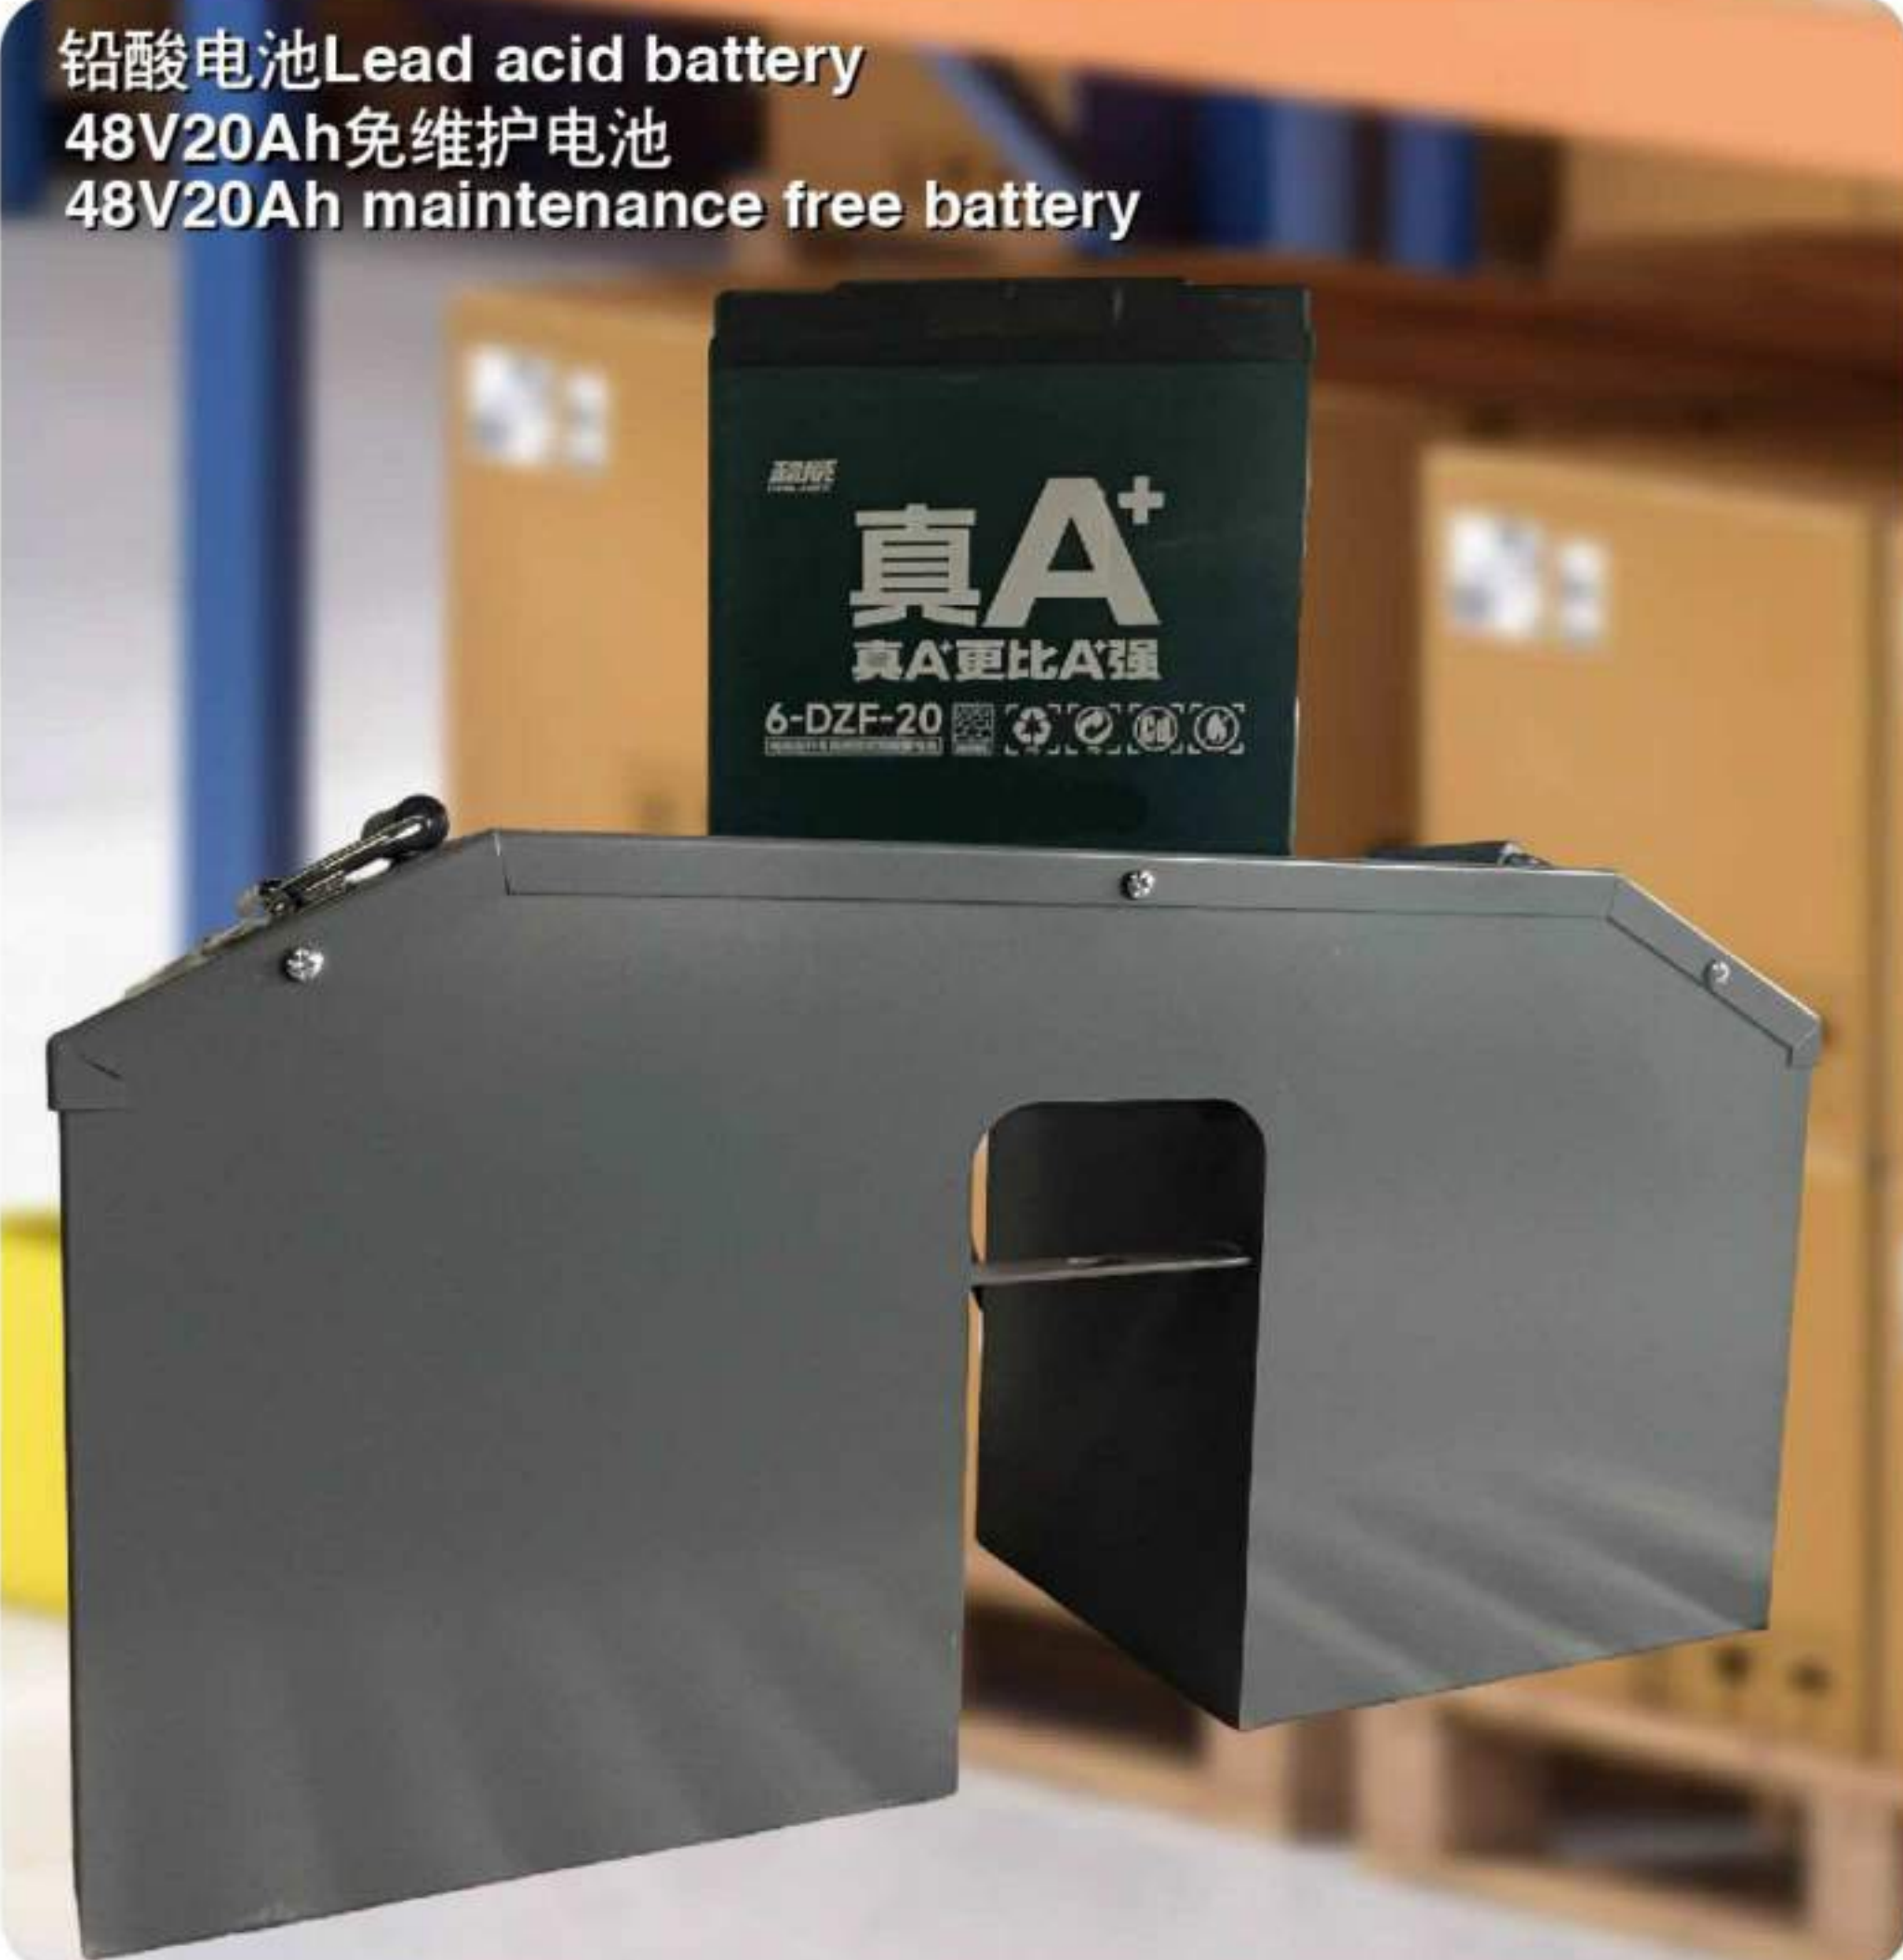

技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL		单位unit	CBD30AQ
	驱动方式Drive mode			电动electric
	操作类型Operation type			步行式Walking style
	载荷load		Kg	3000
基本尺寸 Basic dimensions	重量含蓄电池Weight reserved battery		Kg	157
	整车长度Vehicle length		mm	1680
	整车宽度Vehicle width		mm	550/685
	整车高度Vehicle height		mm	1220
	起升高度Lift Height		mm	195
	货叉尺寸Fork size		mm	56/160/1150
	货叉外宽Fork outer width		mm	550/685
	轮子类型wheel type			PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size			Φ160*50
性能 Performance	承载轮尺寸Bearing wheel size			4*Φ80*70
	行走速度满载/空载Walking speed with full load/empty load		Km/h	4/4.5
	爬坡度满载/空载Climbing degree with full load/empty load		%	6/10
	制动方式Braking method			励磁制动Excitation braking
	驱动电机功率Drive motor power		Kw	0.8
驱动 Drive	起升电机功率Power of lifting motor		kw	0.8
	蓄电池电压/容量Battery voltage/capacity		V/Ah	48V20Ah
	蓄电池重量Weight of battery		kg	24
	蓄电池尺寸长/宽/高Battery size: length/width/height		mm	317/191/202
其他other	蓄电池类型Battery type			铅酸免维护Lead acid maintenance free
	驱动控制类型Drive control type			直流无刷dc brushless

电子秤全电动搬运车AQC30
Electronic scale fully electric transport vehicle AQC30

- 产品特点:
- 1、IP65 级表头 (防水、防尘)
 - 2、高精分度传感器 (分度值 0.2, 精度高、灵敏高、误差低)
 - 3、48V800W无刷电机 (免维护驱动电机)
 - 4、智能操作手柄 (电动升降、电动行走、紧急反向)

- Product features:
- 1、IP65 level header (waterproof, dustproof)
 - 2、High precision indexing sensor (with an indexing value of 0.2, high accuracy, sensitivity, and low error)
 - 3、48V800W brushless motor (maintenance free drive motor)
 - 4、Intelligent operation handle (electric lifting, electric walking, emergency reverse)



舒适把手
Comfortable Grip

耐磨防滑
Wear resistant and slip resistant

加固加厚
Strengthening and thickening

不漏油
No oil leakage

加厚货叉
Thick fork

大容量电池
High capacity battery



技术参数 | TECHNICAL PARAMETERS

特性 characteristic	产品型号PRODUCT MODEL	单位unit	CBD30AQC
	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	3000
基本尺寸 Basic dimensions	重量含蓄电池Weight reserved battery	Kg	180
	整车长度Vehicle length	mm	1680
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1220
	起升高度Lift Height	mm	195
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ160*50
性能 Performance	承载轮尺寸Bearing wheel size		4*Φ80*70
	行走速度满载/空载Walking speed with full load/empty load	Km/h	4/4.5
	爬坡度满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		励磁制动Excitation braking
	驱动电机功率Drive motor power	Kw	0.8
驱动 Drive	起升电机功率Power of lifting motor	kw	0.8
	蓄电池电压/容量Battery voltage/capacity	V/Ah	48/20
	蓄电池重量Weight of battery	kg	24
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	317/191/202
	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
	称重表头电池电压/容量Weighing meter head battery voltage/capacity	V/Ah	3.7/5.2
	称重表头电池类型Weighing meter head battery type		锂电Lithium battery
其他other	称重误差 (分度值) Weighing error (Resolution)		0.2
	驱动控制类型Drive control type		直流无刷dc brushless

移动式手动高起升搬运车
Mobile manual high lift truck

- 产品特点:
- 1、镀铬手柄（优质钢材，寿命持久耐用）
 - 2、加厚剪叉（坚固稳定不变形）
 - 3、整体密封油缸（一体油缸升降更省力不漏油 使用寿命更长更耐用）
- Product features:
- 1、Chrome plated handle (made of high-quality steel, with a long-lasting and durable lifespan)
 - 2、Thickened scissor (sturdy, stable, and not deformed)
 - 3、Integrated sealed oil cylinder (the lifting and lowering of the integrated oil cylinder is more effortless and does not leak oil) Longer and more durable lifespan



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



加粗弹簧
Bold spring



镀铬手柄Chrome plated handle
优质钢材，寿命持久耐用
High quality steel with a long and
durable lifespan



加厚剪叉Thickened Scissors
坚固稳定不变形
Durable and stable
without deformation



整体密封油缸Integrated sealed
oil cylinder
一体油缸升降更省力
不漏油 使用寿命更长更耐用
Integrated oil cylinder lifting is more
effortless No oil leakage, longer service
life and more durable



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	EGS1000-550	EGS1000-685
额定载重rated load	kg	1000	1000
最低高度Minimum height	mm	85	85
最高高度Height	mm	850	850
货叉叉长Fork length	mm	1150	1150
货叉宽度Fork width	mm	550	685
总长度Total length	mm	1675	1675
总高度Total height	mm	1100	1100
自重weight	Kg	141	147

凯斯顿
Kaiston

PRODUCT DISPLAY 产品展示

移动式半电动高起升搬运车
Mobile semi electric high lift truck

- 产品特点:
- 1、电动升降 (48V12Ah锂电, 电动控制起升下降)
 - 2、加厚剪叉 (坚固稳定、不变形)
 - 3、整体密封油缸 (一体油缸升降更省力不漏油 使用寿命更长更耐用)
- Product features:
- 1、Electric lifting (48V12Ah lithium battery, electrically controlled lifting and lowering)
 - 2、Thickened scissor (sturdy, stable, and not deformed)
 - 3、Integrated sealed oil cylinder (the lifting and lowering of the integrated oil cylinder is more effortless and does not leak oil) Longer and more durable lifespan



加厚剪叉Reinforced Scissors
坚固稳定不变形
Durable, stable, and not easily deformed



电动升降Electric lifting
48V12Ah锂电, 电动控制起升下降
48V12Ah lithium battery,
electrically controlled lifting
and lowering



整体密封油缸Integrated sealed
oil cylinder
一体油缸升降更省力不漏油 使用寿命
更长更耐用
Integrated oil cylinder lifting is more
effortless No oil leakage, longer service
life and more durable

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	EGSL1000 -550	EGSL1000-685
额定载荷rated load	KG	1000	1000
最低高度Minimum height	mm	85	85
最高高度Height	mm	850	850
货叉叉长Fork length	mm	1150	1150
货叉宽度Fork width	mm	550	685
总长度Total length	mm	1675	1675
总高度Total height	mm	1100	1100
自重weight	KG	141	147
电池类型battery type		锂电池(48V12Ah)Lithium battery (48V12Ah)	



剪叉式手动高起升搬运车

Scissor type manual high lift truck

- 产品特点:
- 1、双级油缸设计
 - 2、双速泵芯设计 (300 公斤以下快速起升, 300 公斤以上慢速省力起升, 效率与操作舒适相统一)
 - 3、加厚剪叉 (抗弯曲不变形)
 - 4、PU 静音轮 (噪音小, 不伤地面、承载更强)

- Product features:
- 1、Dual stage oil cylinder design
 - 2、Dual speed pump core design (fast lifting below 300 kg, slow and effortless lifting above 300 kg, combining efficiency with comfortable operation)
 - 3、Thickened scissor (resistant to bending and deformation)
 - 4、PU silent wheel (with low noise, no damage to the ground and stronger load-bearing capacity)



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGS15-550	JGS15-685
规格specifications	mm	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
轮子类型wheel type		PU/聚氨酯/PU/Polyurethane	PU/聚氨酯/PU/Polyurethane
大轮尺寸Large wheel size	mn	180*50	180*50
承重轮尺寸Bearing wheel size	mm	70*50	70*50
整车高度Vehicle height	mm	1365	1365
总体长度overall length	mm	1580	1580
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
自重weight	Kg	123	129

噪音微小
Low noise level


加厚钢材
Thickened steel

承重力强
Strong load-bearing capacity

静音耐磨脚轮
Silent and wear-resistant casters

多场景适用
Suitable for multiple scenarios

操作简单
Simple operation

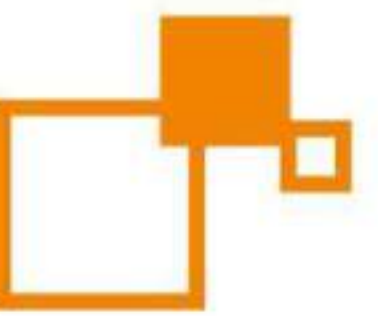

半电动高起升搬运车（红外感应款）


Semi electric high lift truck (infrared induction model)

产品特点:

- 1、电动调节（电动上升、电动下降）
- 2、红外感应控制升降（光电感应、自动升降）
- 3、一体油泵设计（起升平稳、轻松）
- 4、电瓶、电器件不随车起升（能效高、节能环保）

Product features:

- 1、Electric adjustment (electric rise, electric fall)
- 2、Infrared sensing control for lifting (photoelectric sensing, automatic lifting)
- 3、Integrated oil pump design (Smooth and easy lifting)
- 4、The battery and electrical components are not lifted with the vehicle (high energy efficiency, energy-saving and environmentally friendly)

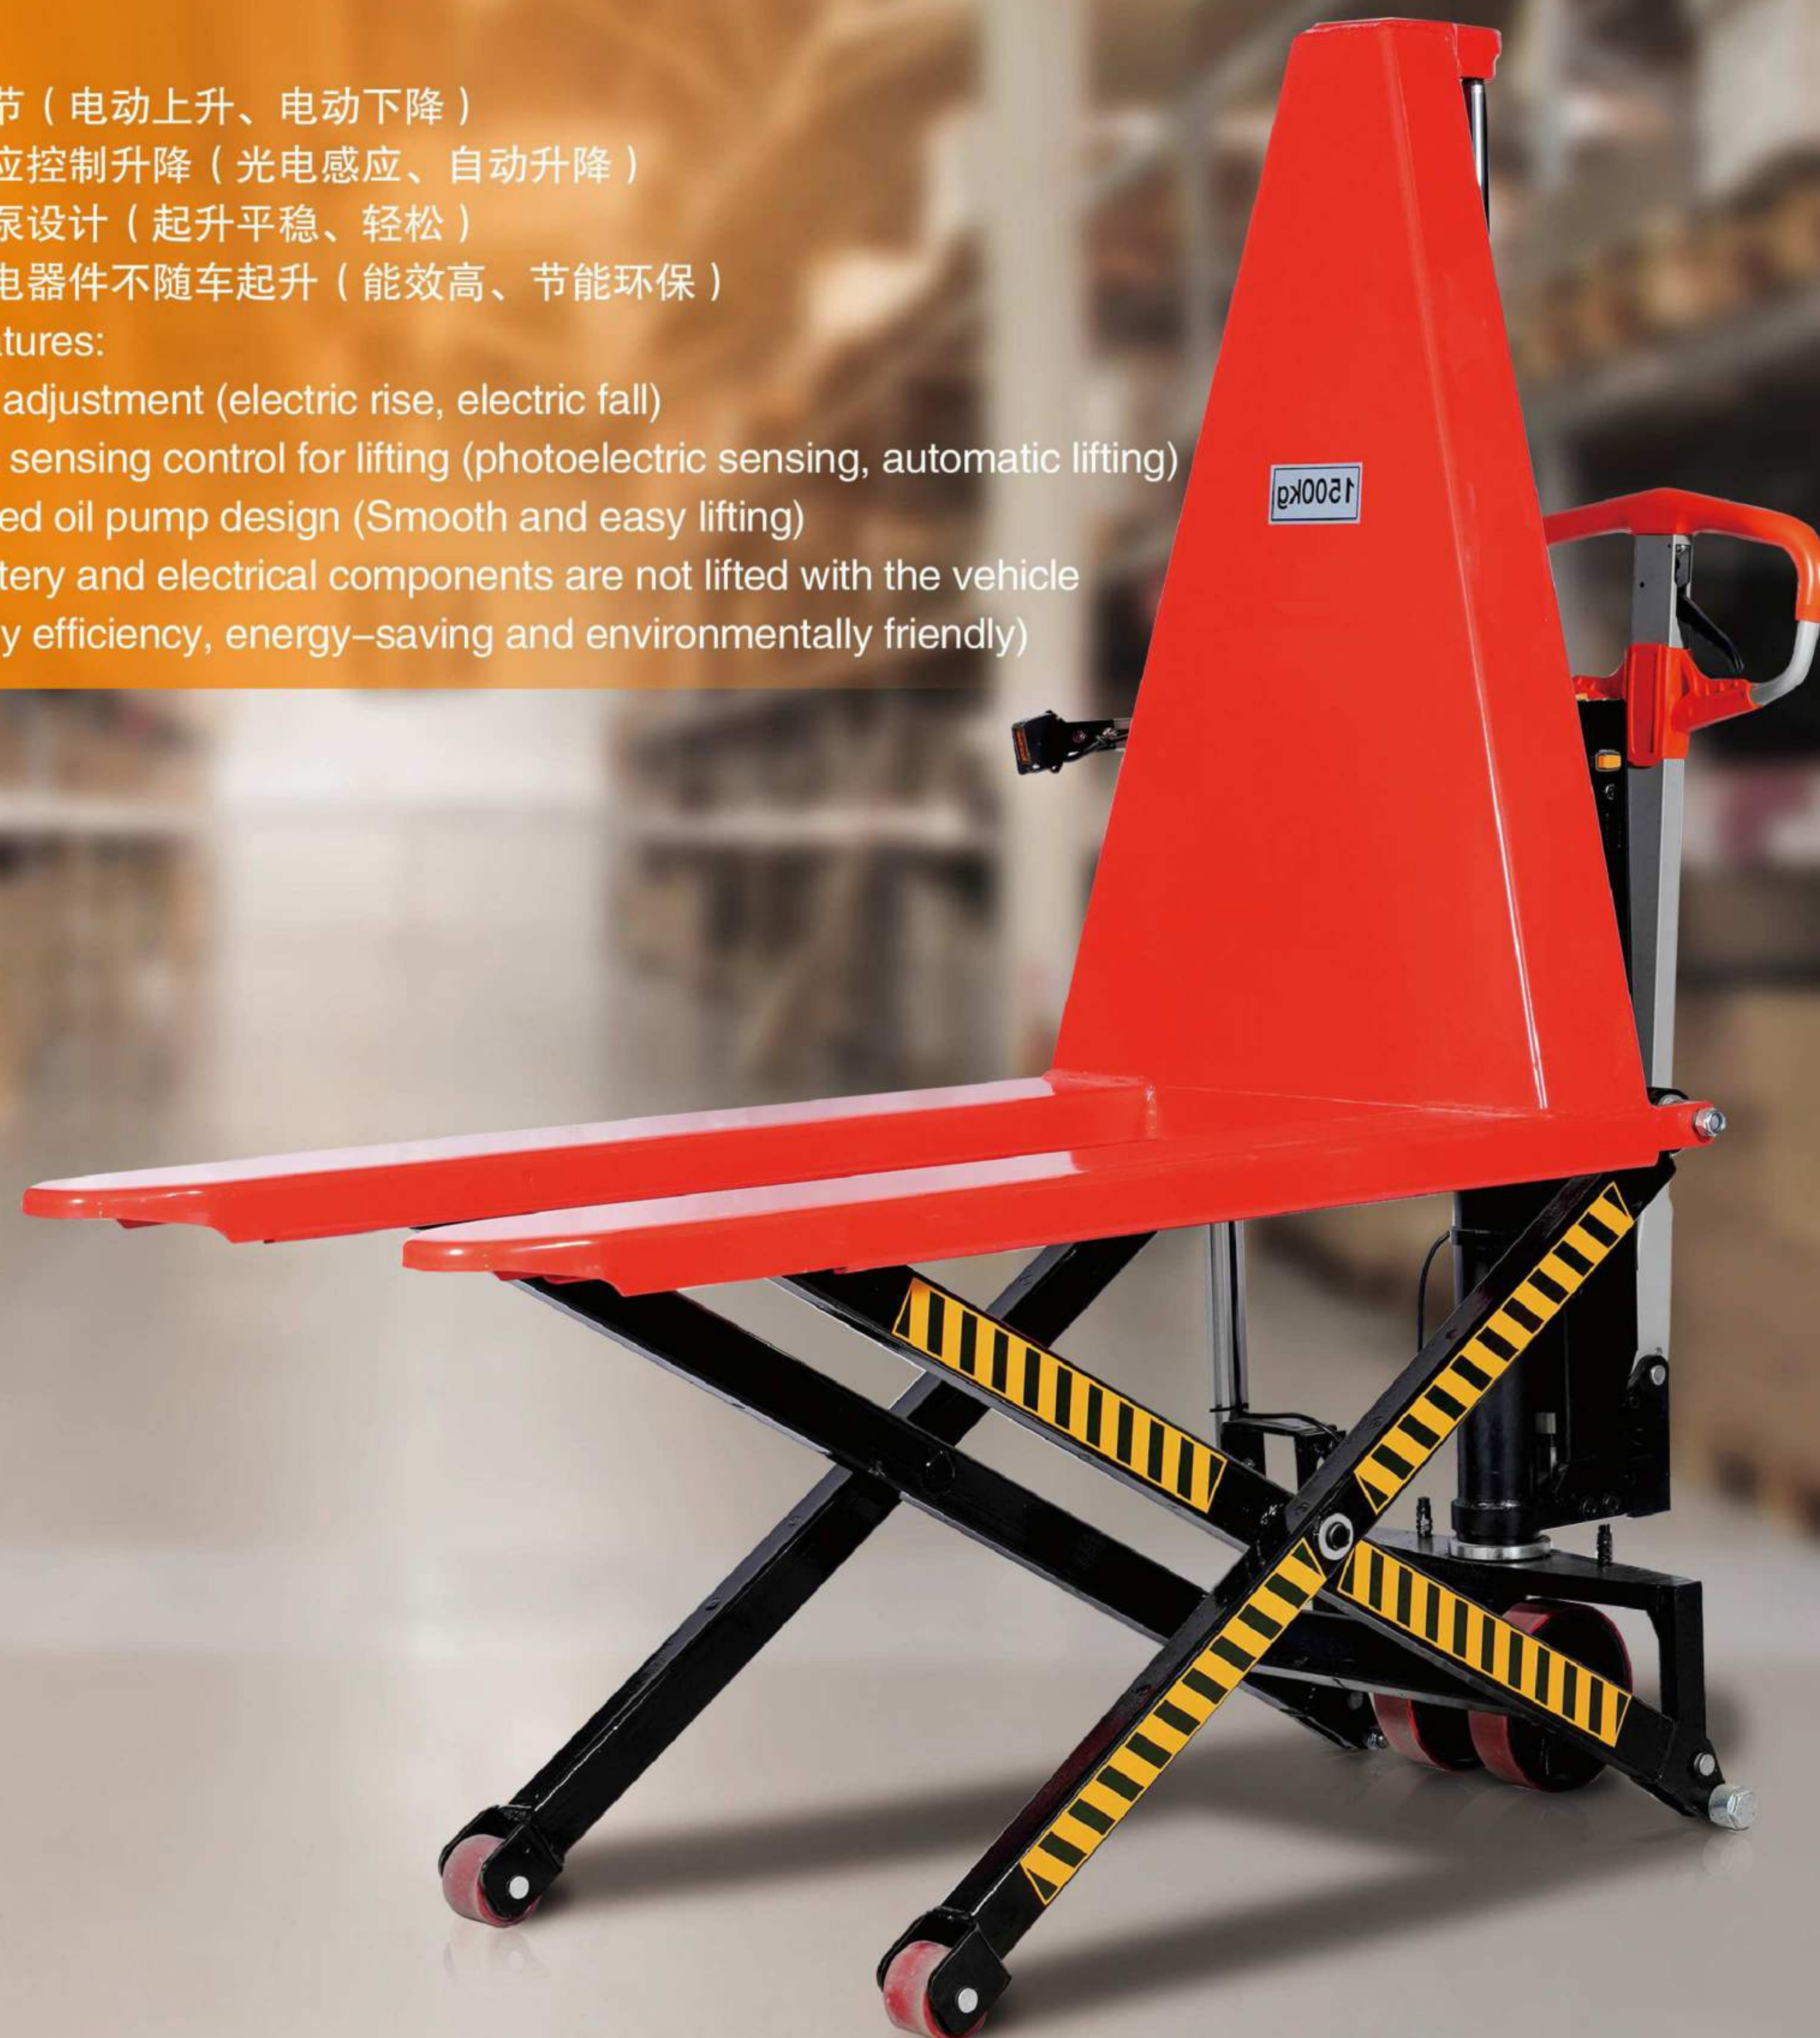

舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork




大容量电池
High capacity battery



聚氨酯静音轮
Polyurethane silent wheel
噪音小，不伤地面
Low noise, does not harm
the ground



红外感应Infrared induction
光电感应、自动升降
Photoelectric sensing, automatic
lifting and lowering

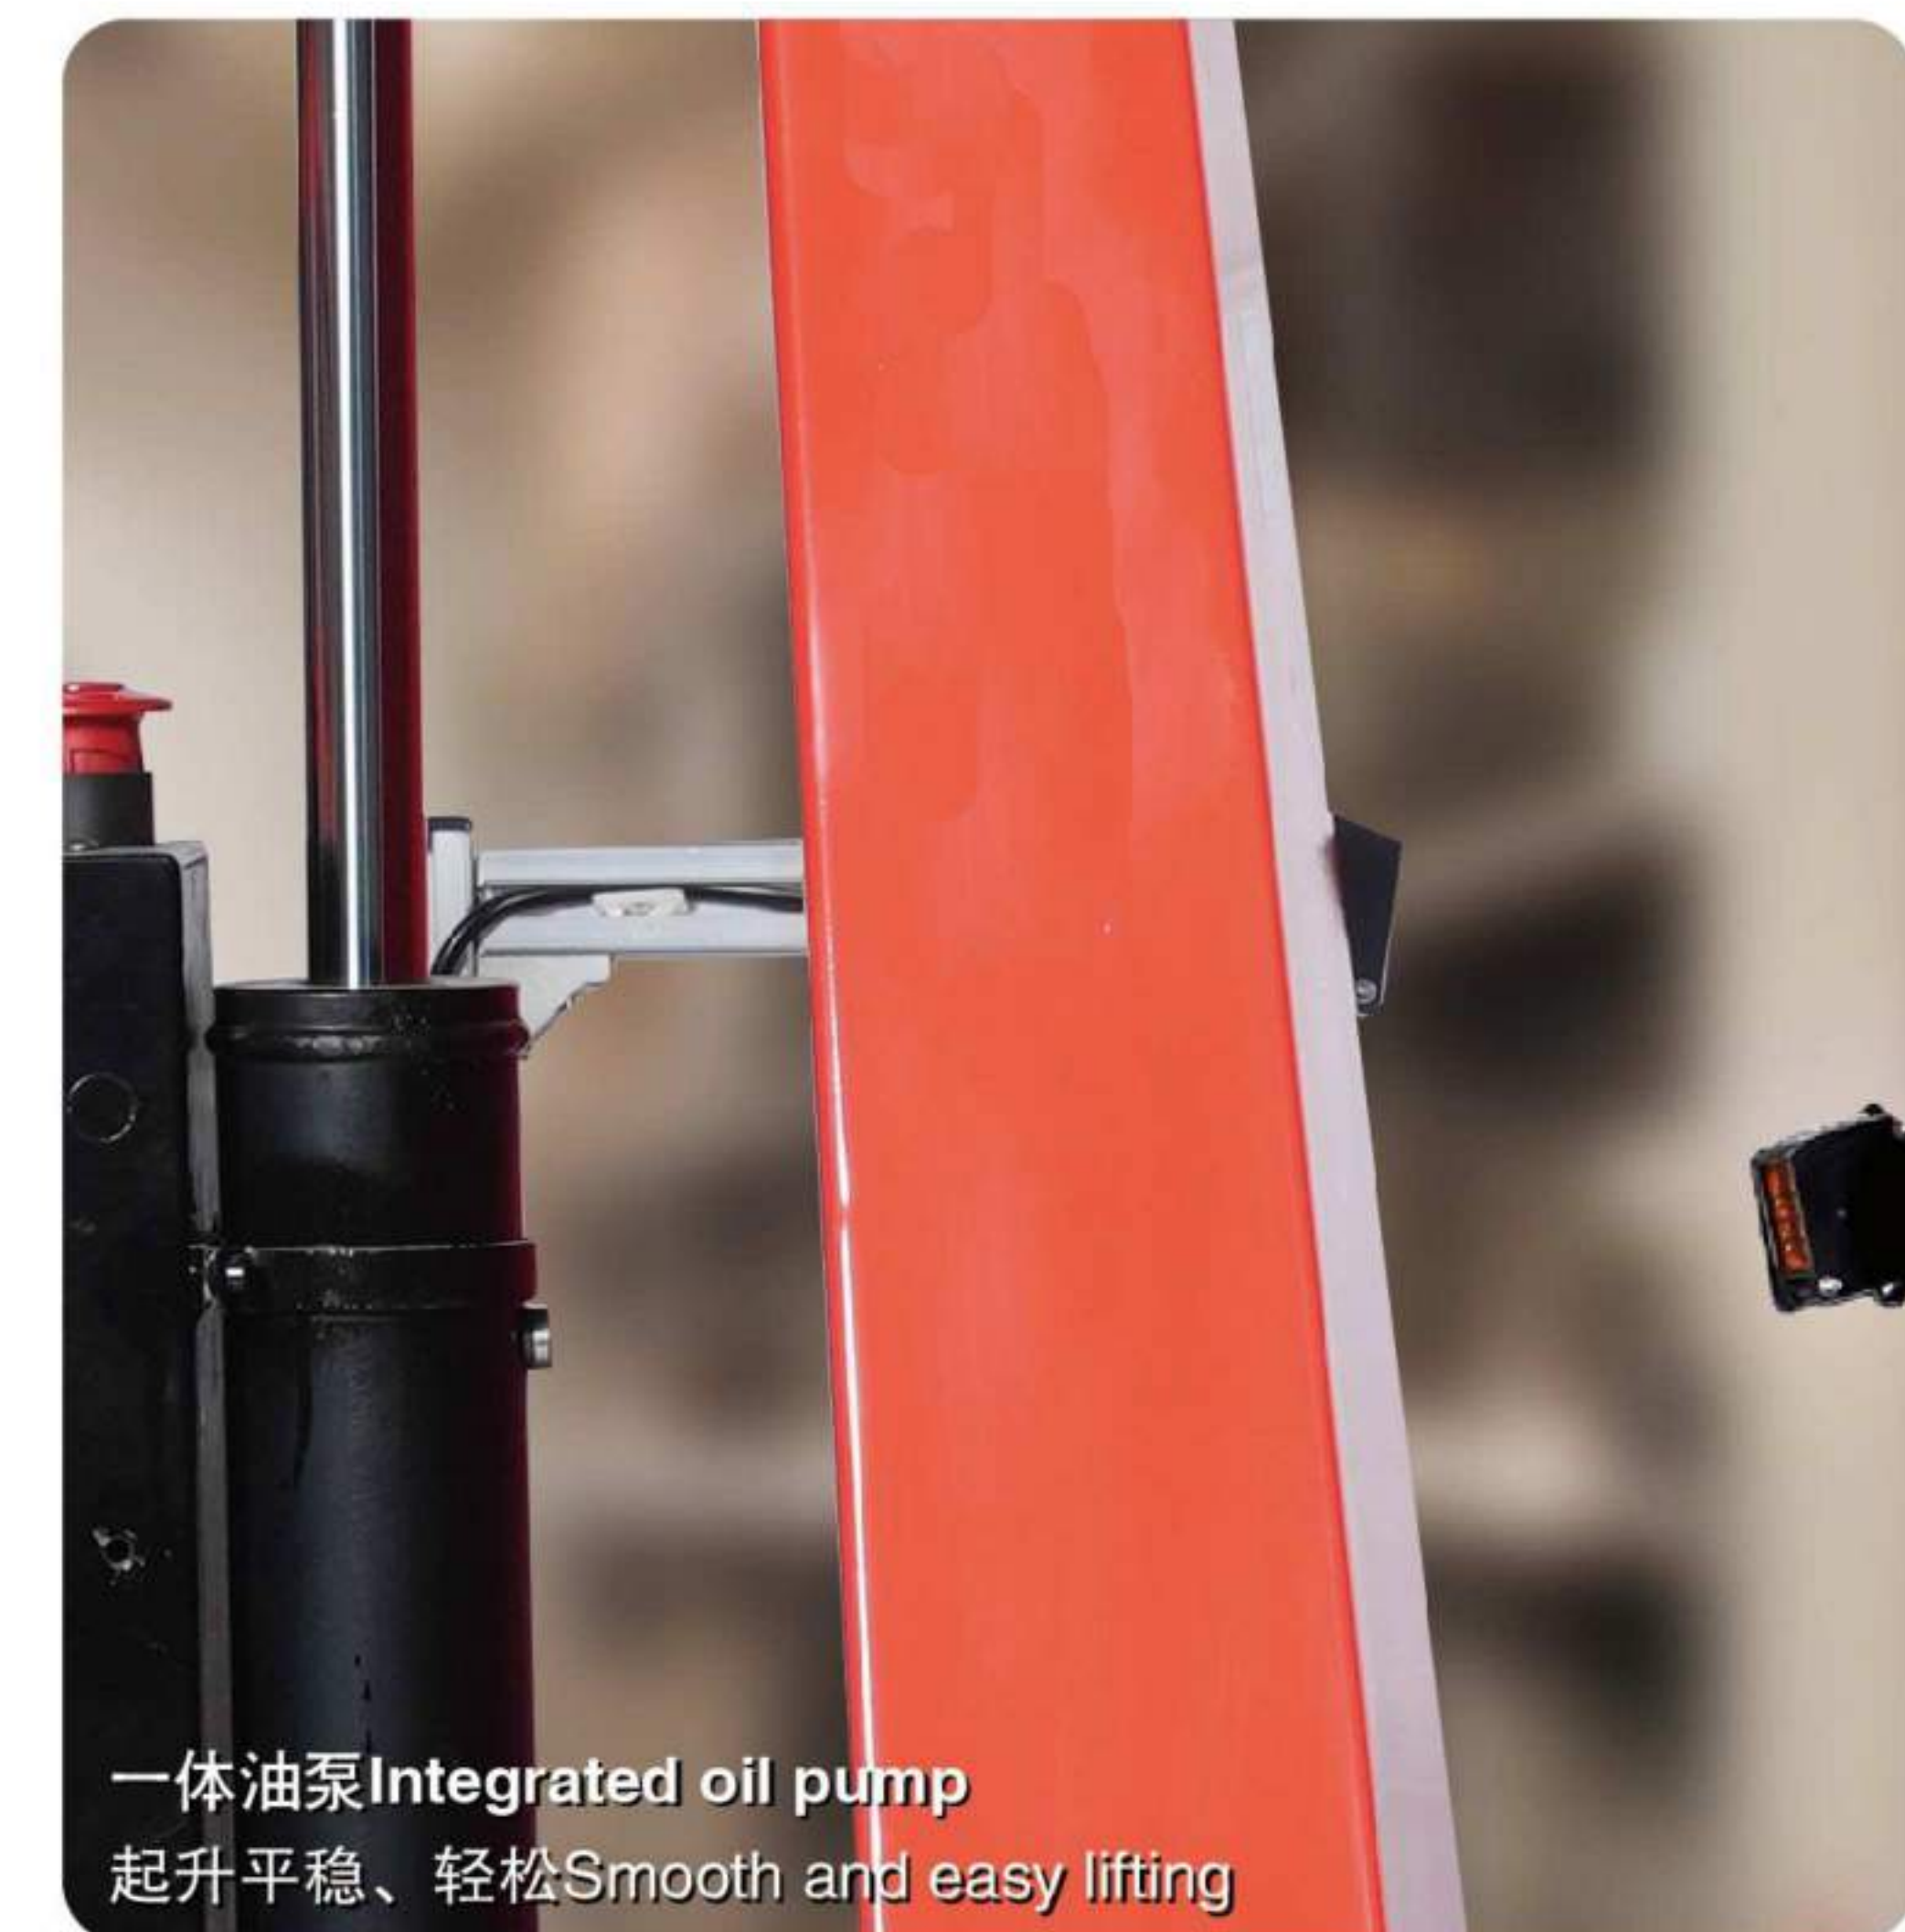

一体油泵Integrated oil pump
起升平稳、轻松
Smooth and easy lifting




技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGSLG15-550	JGSLG15-685
规格specifications	mm	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
最大起升行程Maximum lifting stroke	mm	>710	>710
轮子类型wheel type		聚氨酯/尼龙Polyurethane/Nylon	聚氨酯/尼龙Polyurethane/Nylon
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ74 * 55	Φ74 * 55
整车高度Vehicle height	mm	1208	1208
总体长度overall length	mm	1650	1650
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
蓄电池类型Battery type		锂电池lithium battery	锂电池lithium battery
蓄电池电压/容量Battery voltage/capacity	V/Ah	48/12	48/12
起升电机功率Battery voltage/capacity	kw	0.8	0.8
自重weight	Kg	149	155

凯斯顿
Kaiston

PRODUCT DISPLAY

产品展示

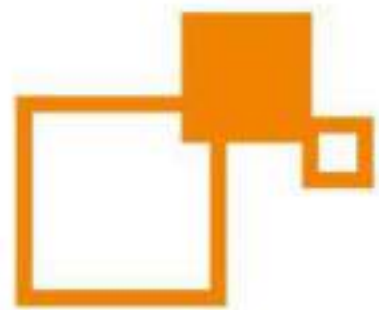

剪叉式全电动高起升搬运车

Scissor type fully electric high lift truck

- 产品特点:
- 1、电动调节 (电动升降、电动行走)
 - 2、一体油泵设计 (双节活塞杆，货叉起升更快)
 - 3、电瓶、电器件不随车起升 (能效高、节能环保)
- Product features:
- 1、Electric adjustment (electric lifting, electric walking)
 - 2、Integrated oil pump design (double section piston rod, faster fork lifting)
 - 3、The battery and electrical components are not lifted with the vehicle (high energy efficiency, energy-saving and environmentally friendly)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery



电动调节Electric adjustment
电动上升、电动下降Electric ascent,
electric descent



电量显示Power display



一体油泵Integrated oil pump
双节活塞杆，货叉起升更高更快
double piston rods, fork lifting higher and faster



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGSQQ15-550	JGSQQ15-685
规格specifications	mm	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
最大起升行程Maximum lifting stroke	mm	>710	>710
轮子类型wheel type		聚氨酯/尼龙Polyurethane/Nylon	聚氨酯/尼龙Polyurethane/Nylon
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ74*55	Φ74*55
整车高度Vehicle height	mm	1310	1310
总体长度overall length	mm	1780	1780
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
蓄电池类型Battery type		铅酸电池Lead acid battery	铅酸电池Lead acid battery
蓄电池电压/容量Battery voltage/capacity	VAh	48/20	48/20
起升电机功率Battery voltage/capacity	kw	0.8	0.8
驱动电机功率Drive motor power	kw	0.8	0.8
自重weight	Kg	192	198

凯斯顿
Kaiston

PRODUCT DISPLAY 产品展示



单剪式平台车
Single cut platform vehicle

- 产品特点:
- 1、镀铬手柄（手感舒适、坚固耐用）
 - 2、脚踏式起升（起升更轻松）
 - 3、拉线式下降（下降更灵活）
 - 4、加厚剪叉（抗弯曲不变形）
 - 5、加强型油缸（双重油封保护，杜绝漏油，动力更加强劲更稳定）
- Product features:
- 1、Chrome plated handle (comfortable to the touch, sturdy and durable)
 - 2、Foot operated lifting (easier lifting)
 - 3、Pull type descent (more flexible descent)
 - 4、Thickened scissor (resistant to bending and deformation)
 - 5、Enhanced oil cylinder (with dual oil seal protection to prevent oil leakage, providing stronger and more stable power)





噪音微小
Low noise level



加厚钢材
Thickened steel



承重力强
Strong load-bearing capacity



静音耐磨脚轮
Silent and wear-resistant casters



多场景适用
Suitable for multiple scenarios



操作简单
Simple operation



技术参数 | TECHNICAL PARAMETERS

型号 Model	单位	PTD150	PTD350	PTD500
额定载荷Rated load model (double shear type)	KG	150	350	500
平台最低高度Minimum platform height	mm	220	290	290
平台起升后最高高度Maximum height after platform lifting	mm	720	900	900
平台尺寸Platform size	mm	700*450*36	815*500*50	815*500*50
子轮尺寸Sub wheel size	mm	φ100*30	φ125*50	φ125*50
手柄离地高度Ground clearance height of handle	mm	820	960	990
平台起升至最高油泵压次数 Number of times the platform is raised to the maximum oil pump pressure	次	< 26	< 35	< 35
自重weight	kg	39	70	74

双剪式平台车
Double scissor platform vehicle

- 产品特点:
- 1、镀铬手柄（手感舒适、坚固耐用）
 - 2、脚踏式起升（起升更轻松）
 - 3、拉线式下降（下降更灵活）
 - 4、加厚剪叉（抗弯曲不变形）
 - 5、加强型油缸（双重油封保护，杜绝漏油，动力更加强劲更稳定）
- Product features:
- 1、Chrome plated handle (comfortable to the touch, sturdy and durable)
 - 2、Foot operated lifting (easier lifting)
 - 3、Pull type descent (more flexible descent)
 - 4、Thickened scissor (resistant to bending and deformation)
 - 5、Enhanced oil cylinder (with dual oil seal protection to prevent oil leakage, providing stronger and more stable power)





噪音微小
Low noise level



加厚钢材
Thickened steel



承重力强
Strong load-bearing capacity



静音耐磨脚轮
Silent and wear-resistant casters



多场景适用
Suitable for multiple scenarios



操作简单
Simple operation



技术参数 | TECHNICAL PARAMETERS

型号(双剪式)Model (Double Scissor)	单位	PTS350-1.3	PTS500-1.3	PTS350-1.5	PTS500-1.5	PTFS1000-1.7	PTFS1000-1.8
额定载荷Rated load model (double shear type)	KG	350	500	350	500	1000	1000
平台最低高度Minimum platform height	mm	390	390	390	390	500	560
平台起升后最高高度Maximum height after platform lifting	mm	1300	1300	1500	1500	1700	1800
平台尺寸Platform size	mm	910*510*55	910*510*55	910*510*55	910*510*55	1200*610*60	1500*800*55
子轮尺寸Sub wheel size	mm	φ150*50	φ150*50	φ150*50	φ150*50	φ150*50	φ150*50
手柄离地高度Ground clearance height of handle	mm	1020	1020	1020	1020	1040	1060
平台起升至最高油泵压次数 Number of times the platform is raised to the maximum oil pump pressure	次	< 49	< 49	< 53	< 53	< 145	< 150
自重weight	kg	95	110	98	114	193.5	306.5

手动搬运车-AF款
Manual handling vehicle – AF model

- 产品特点:
- 1、锻打摇臂，加装铜套（提升强度、耐磨度、重载不变形）
 - 2、整体油缸（加粗活塞杆，起升更省力）
 - 3、高档手柄（握感舒适，防滑，加厚耐用）
 - 4、实心拉杆（重载不变形）

- Product features:
- 1、Forging rocker arms and installing copper sleeves (to enhance strength, wear resistance, and prevent deformation under heavy loads)
 - 2、Integral oil cylinder (with thicker piston rod for easier lifting)
 - 3、High end handle (comfortable grip, anti slip, thick and durable)
 - 4、Solid rod (no deformation under heavy load)



技术参数 | TECHNICAL PARAMETERS

型号model	单位unit			
额定载重rated load	Kg	2000	3000	5000
降低时高度Height during descent	mm	85	85	85
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70	Φ80*70	Φ80*66
总体高度Overall height	mm	1224	1224	1224
总体长度overall length	mm	1533/1603	1533/1603	1533/1603
货叉长度FORK LENGTH	mm	1150/1220	1150/1220	1150/1220
货叉外宽Fork outer width	mm	550/685	550/685	550/685
自重weight	Kg	78/80	82/84	114/120

舒适把手
Comfortable Grip


耐磨防滑
Wear resistant and slip resistant

加固加厚
Strengthening and thickening

不漏油
No oil leakage


加厚货叉
Thick fork

加粗弹簧
Bold spring

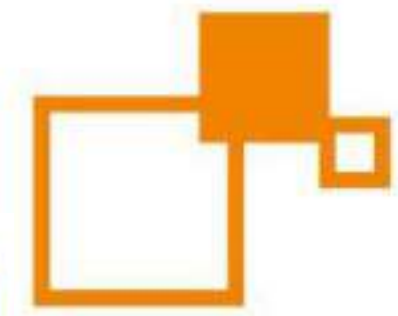


轻型手动堆高车
Lightweight stacker truck

- 产品特点:
- 1、轻巧型车身（转弯半径小，操作舒适）
 - 2、采用优质无缝钢管，独特定位轮设计（性能稳定，寿命持久耐用）
 - 3、脚踏式起升（操作更方便、轻松）
 - 4、高品质油缸（高密封圈大大提升了油缸的密封性，质量可靠，承载力更强）
- Product features:
- 1、Lightweight body (small turning radius, comfortable operation)
 - 2、Using high-quality seamless steel pipes and unique positioning wheel design (stable performance, long-lasting durability)
 - 3、Foot operated brake (more convenient and easy to operate)
 - 4、High quality oil cylinder (high sealing ring greatly improves the sealing performance of the oil cylinder, reliable quality, Stronger carrying capacity)

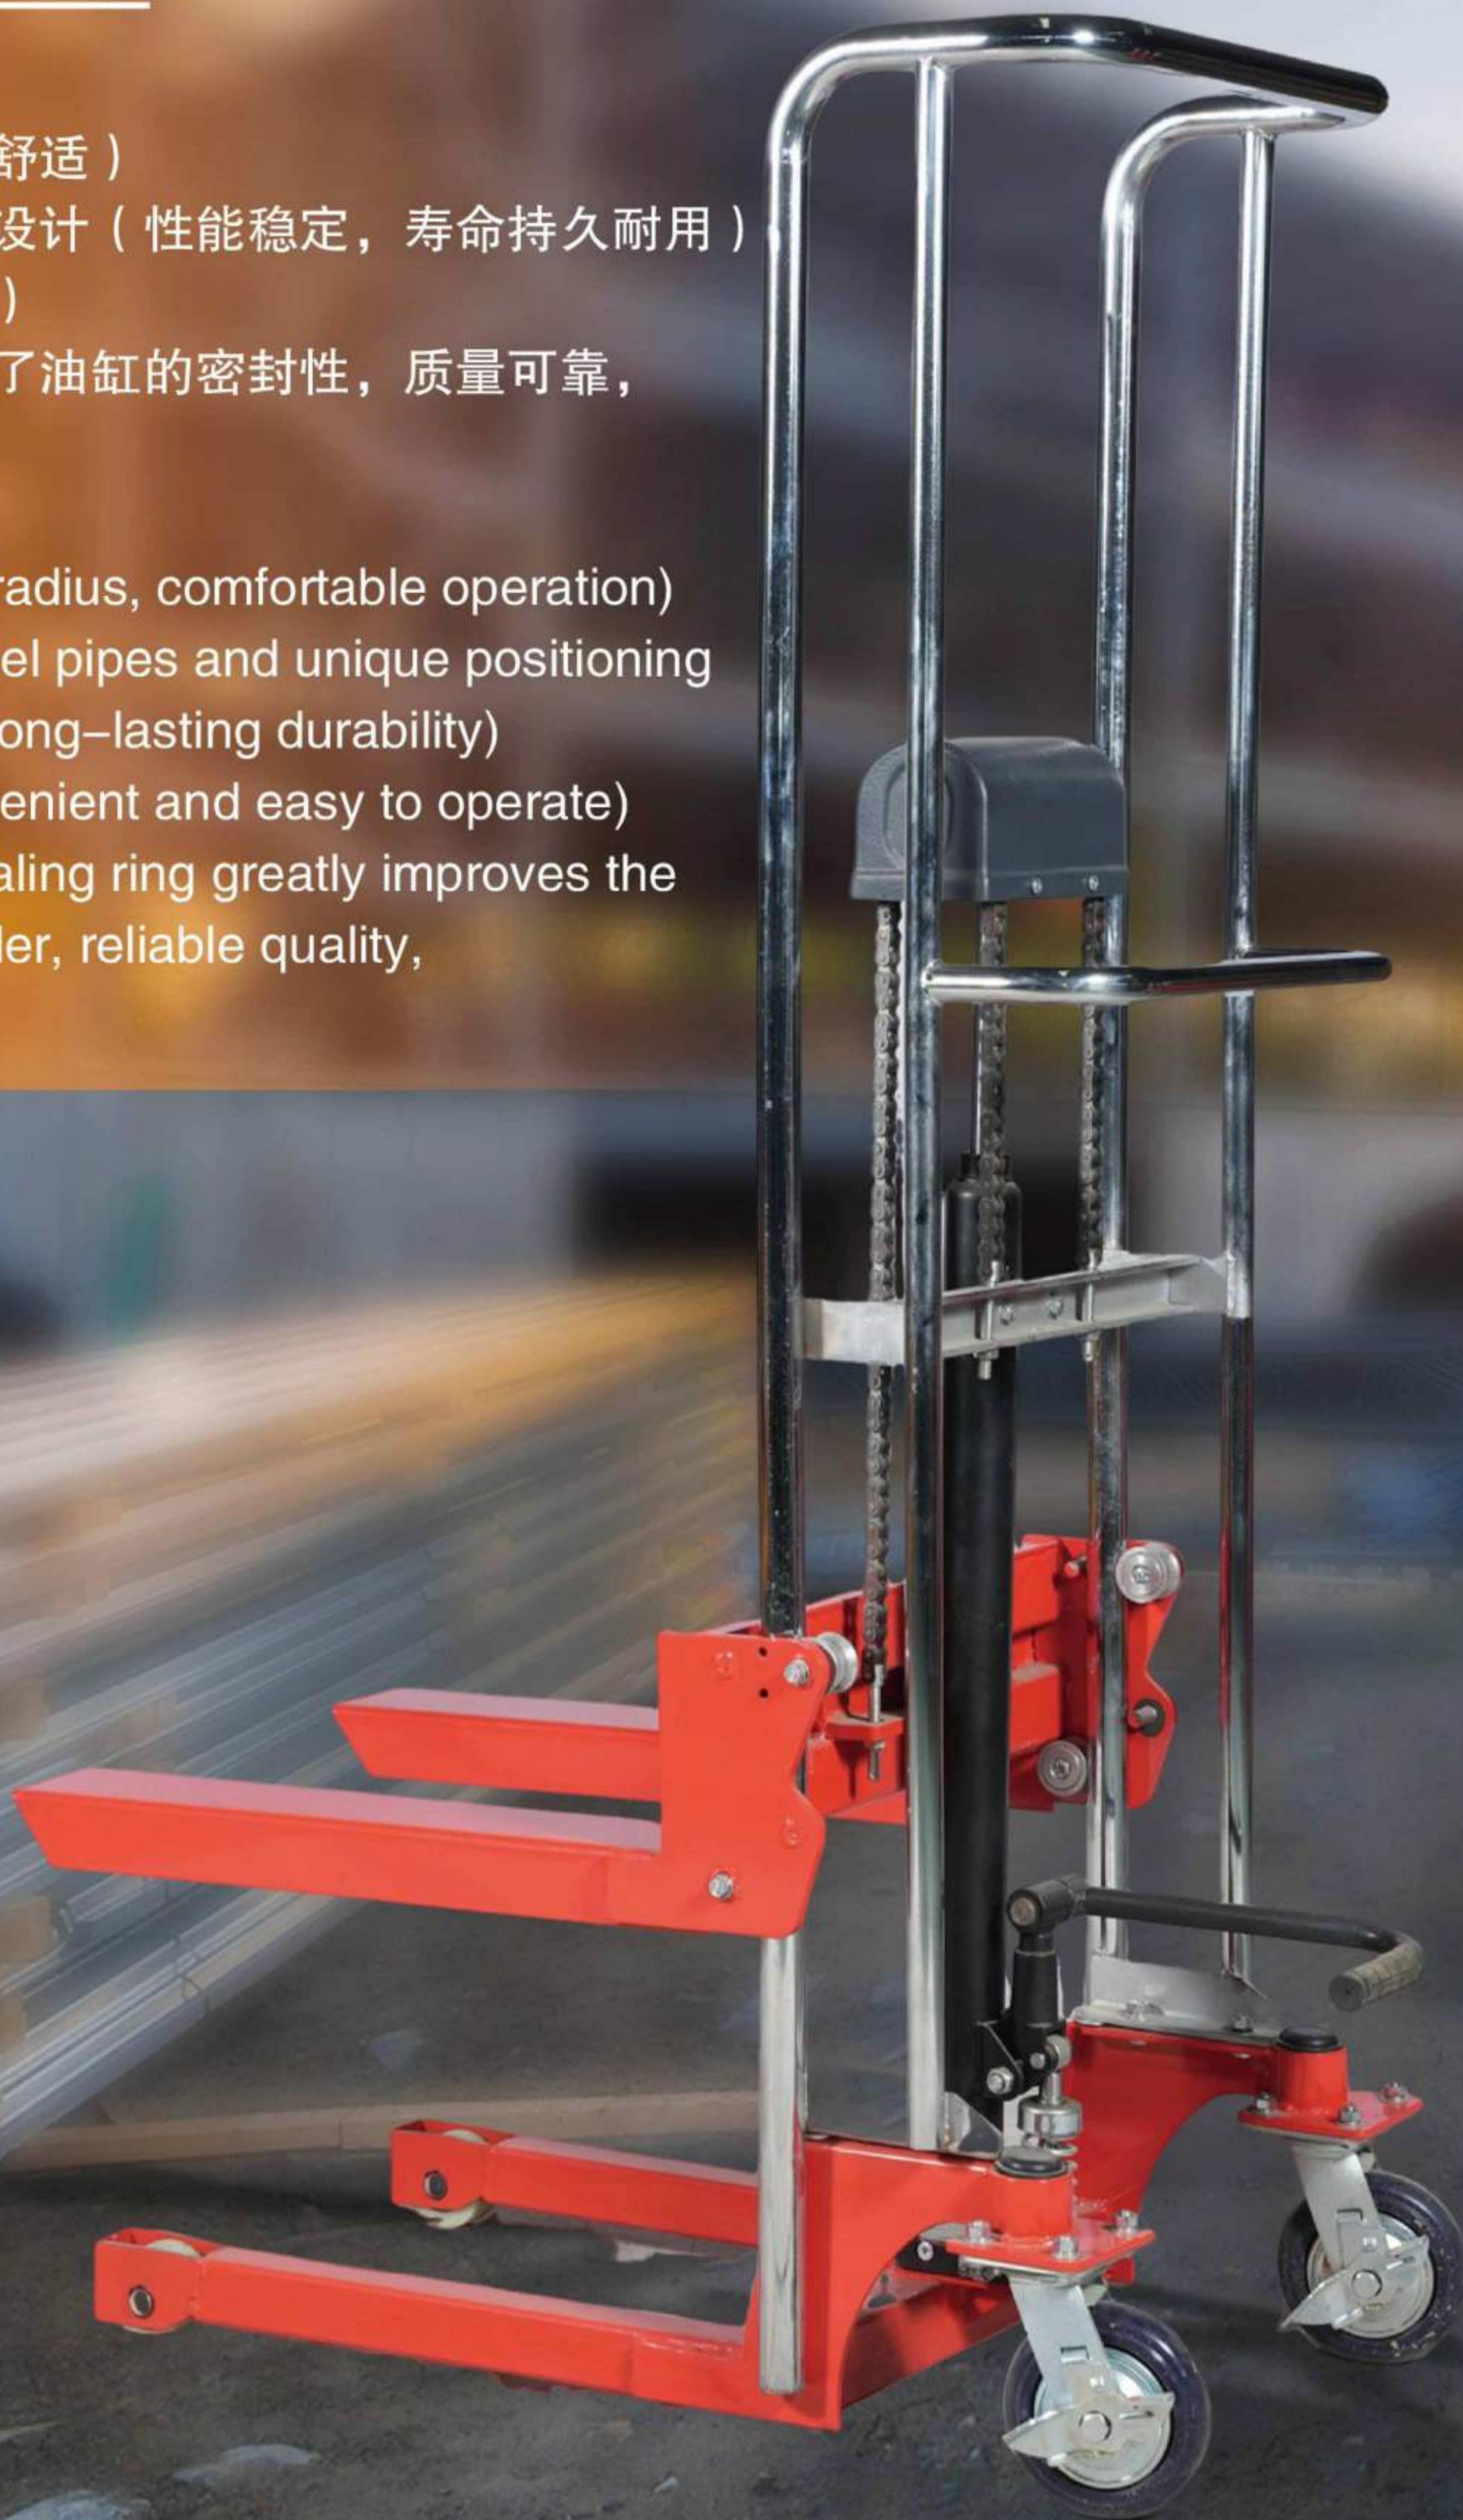

脚踏式起升Foot operated lifting
操作更方便、轻松
More convenient and easy to operate

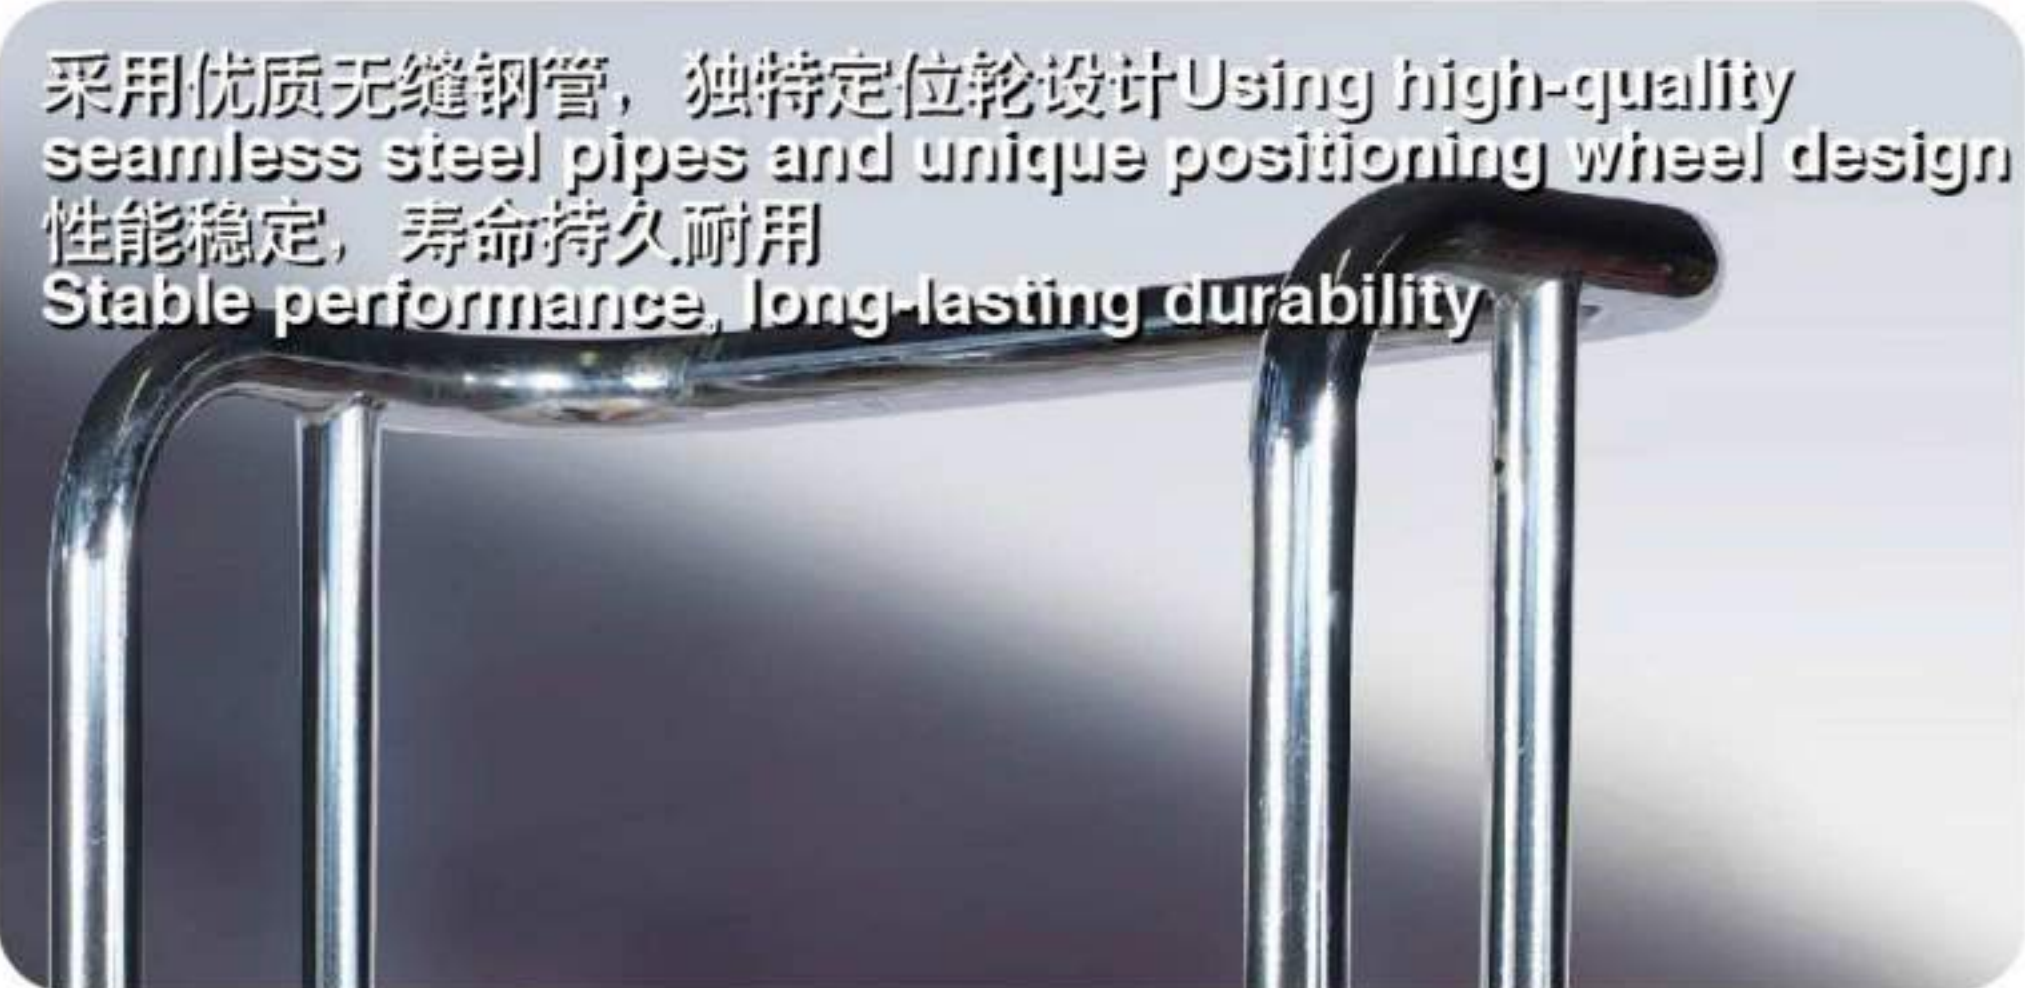

采用优质无缝钢管，独特定位轮设计Using high-quality seamless steel pipes and unique positioning wheel design
性能稳定，寿命持久耐用
Stable performance, long-lasting durability



高品质油缸High quality oil cylinder
高密封圈大大提升了油缸的密封性，质量可靠，承载力更强
The high sealing ring greatly improves the sealing performance of the oil cylinder, ensuring reliable quality, Stronger carrying capacity

技术参数 | TECHNICAL PARAMETERS

	型号规格 Model specifications	单位unit	QD400-1.1	QD400-1.3	QD400-1.5
尺寸 wheel	货叉离地最低高度 Minimum height of fork off the ground	H(mm)	90	90	90
	货叉起升后离地最高高度 The highest height of the fork above the ground after lifting	H(mm)	1100	1300	1500
	货叉外侧宽度Fork outer width	mm	550	550	550
	货叉内侧宽度Inner width of loan fork	mm	320	320	320
	货叉工作长度Fork working length	L(mm)	615	615	615
	单边货叉尺寸Single side fork size	e/a(mm)	110/60	110/60	110/60
	整车长度Vehicle length	L(mm)	1010	1010	1010
	整车宽度Vehicle width	k(mm)	610	610	610
	整车高度Vehicle height	H(mm)	1360	1560	1760
	门架下端离地间隙 Gap between the lower end of the gantry and the ground	mm	30	30	30
	最小转弯半径minimum turning radius	mm	1022	1022	1022
	货叉提升至最高泵压次数(满载) Forklift to maximum pump pressure times (full load)	次数 number	< 46	< 52	< 67
性能 performance	下降速度(满载/空载)Descent speed (full load/empty load)	mm/s	脚控foot control	脚控foot control	脚控foot control
重量weight	自重weight	Kg	94	100	105



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick Fork



加粗弹簧
Bold spring

步行式全电动堆高车

Pedestrian all electric stacker

产品特点:

- 1、多功能智能手柄（手柄设有紧急反向开关，操作更安全）
- 2、集成一体化液压动力单元（性能更稳定可靠）
- 3、加强高锰钢货叉（载重不变形，坚韧耐磨）
- 4、加强密封性油缸（防止漏油，升降更稳，更安全）

Product features:

- 1、Multi functional intelligent handle (the handle is equipped with an emergency reverse switch for safer operation)
- 2、Integrated hydraulic power unit (with more stable and reliable performance)
- 3、Strengthen high manganese steel forks (with no deformation under load, tough and wear-resistant)
- 4、Strengthen the sealing of the oil cylinder (to prevent oil leakage, ensure more stable and safe lifting)



舒适把手
Comfortable Grip



耐磨防滑
Wear resistant
and slip resistant



加固加厚
Strengthening and
thickening



不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery



加强高锰钢货叉Strengthen high manganese steel fork
载重不变形，坚韧耐磨Load resistant without deformation,
tough and wear-resistant



多功能智能手柄Multi functional intelligent controller
手柄设有紧急反向开关，操作更安全
The handle is equipped with an
emergency reverse switch
for safer operation



独立泵站Independent pumping station
性能更稳定可靠More stable and reliable performance



技术参数 | TECHNICAL PARAMETERS

名称型号 Name and Model	单位unit	CDDB15D
额定起重量Rated lifting capacity	kg	1500
操作方式operating mode		步行式Walking style
驱动方式Drive mode		电动electric
起升高度Lift Height		1600 2000 2500 3000 3500
载荷中心距load center		400
货叉最低高度Minimum height of fork	mm	90
货叉长度FORK LENGTH		1150
货叉外宽Fork outer width		320-670
离地间隙 Ground clearance		20
最大行驶速度,满载/空载Maximum driving speed, fullyloaded/unloaded	km/h	3.5/4
最大起升速度, 满载/空载Maximum lifting speed, full load/empty load	mm/s	60/80
最大下降速度, 满载/空载Maximum descent speed, full load/empty load		120/100
最小转弯半径minimum turning radius		1500
驱动轮尺寸 Drive wheel size		Φ210*75
前轮尺寸Rear tyre	mm	Φ80*70
总长Total length		1900
总宽Width		770
总高Height		2080 1580 1830 2080 2330
蓄电池电压/容量Battery voltage/passenger volume	v/Ah	2*12/65
充电器charger		AC220V/50HZ-DG24V/10A
提升电机Lifting motor	v/kw	DC24/2.2
行走电机Walking motor		DC24/0.75
自重weight		357 402 422 442 462

凯斯顿
Kaiston

PRODUCT DISPIAY

产品展示

步行式全电动堆高车
Pedestrian all electric stacker

- 产品特点:
- 1、多功能智能手柄（手柄设有紧急反向开关，操作更安全）
 - 2、集成一体化液压动力单元（性能更稳定可靠）
 - 3、加强高锰钢货叉（载重不变形，坚韧耐磨）
 - 4、加强密封性油缸（防止漏油，升降更稳，更安全）
- Product features:
- 1、Multi functional intelligent handle (the handle is equipped with an emergency reverse switch for safer operation)
 - 2、Integrated hydraulic power unit (with more stable and reliable performance)
 - 3、Strengthen high manganese steel forks (with no deformation under load, tough and wear-resistant)
 - 4、Strengthen the sealing of the oil cylinder (to prevent oil leakage, ensure more stable and safe lifting)





舒适把手
Comfortable Grip



耐磨防滑
Wear resistant and slip resistant



加固加厚
Strengthening and thickening




不漏油
No oil leakage



加厚货叉
Thick fork



大容量电池
High capacity battery

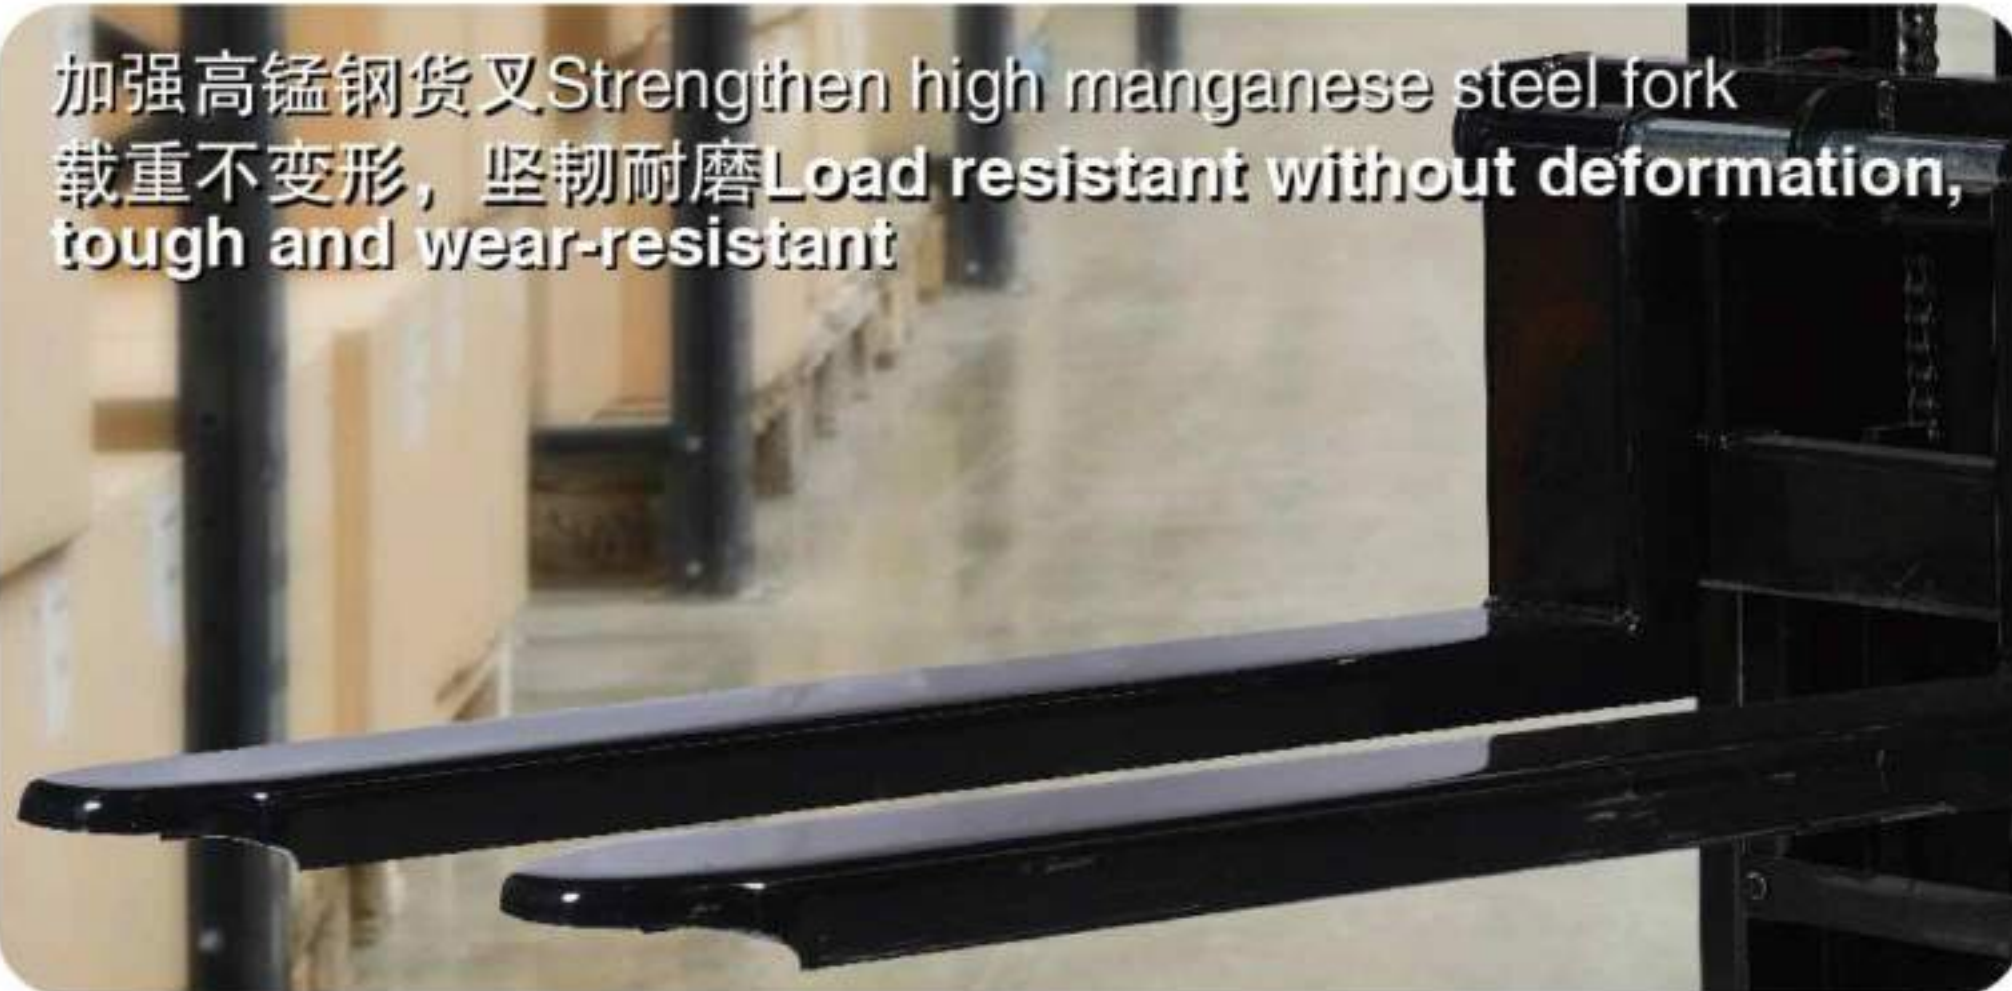

技术参数 | TECHNICAL PARAMETERS

名称型号Name and Model	单位unit	CDDB20D
额定起重量Rated lifting capacity	kg	2000
操作方式operating mode		步行式Walking style
驱动方式Drive mode		电动electric
起升高度Lift Height		1600 2000 2500 3000 3500
载荷中心距load center		400
货叉最低高度Minimum height of fork	mm	90
货叉长度FORK LENGTH		1000
货叉外宽Fork outer width		320-670
离地间隙 Ground clearance		20
最大行驶速度，满载/空载Maximum driving speed, fullyloaded/unloaded	km/h	3.5/4
最大起升速度，满载/空载Maximum lifting speed, full load/empty load	mm/s	60/80
最大下降速度，满载/空载Maximum descent speed, full load/empty load		120/100
最小转弯半径minimum turning radius	mm	1500
前轮尺寸front tyre		Φ80*70
驱动轮尺寸Rear tyre		Φ210*75
总长Total length		1735
总宽Width		960
总高Height		2080 1580 1830 2080 2330
蓄电池电压/容量Battery voltage/passenger volume	v/Ah	2*12/58
充电器charger		AC220V/50HZ-DC24V/10A
提升电机Lifting motor	v/kw	DC24/2.2
行走电机Walking motor		DC24/0.75
自重weight		395 440 460 480 500